



Tank 315

High Chrome Dewatering Pump 50HZ



Pump specifications

OUTPUT	HEAD	FLOW
1.5kW	Rated : 8m	Rated : 8.3L/s
2HP	Max : 14.5m	Max : 11.2L/s
SHAFT SPEED		2850rpm
OUTLET		80mm
SOLID PASSAGE		9mm

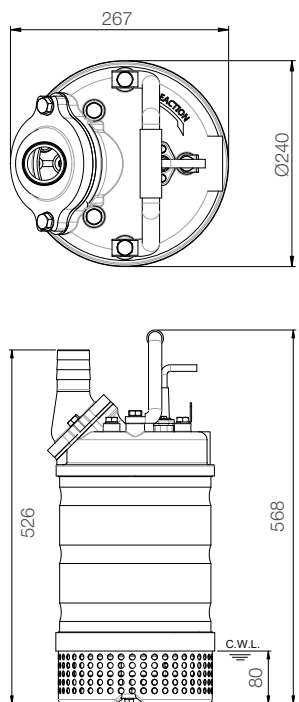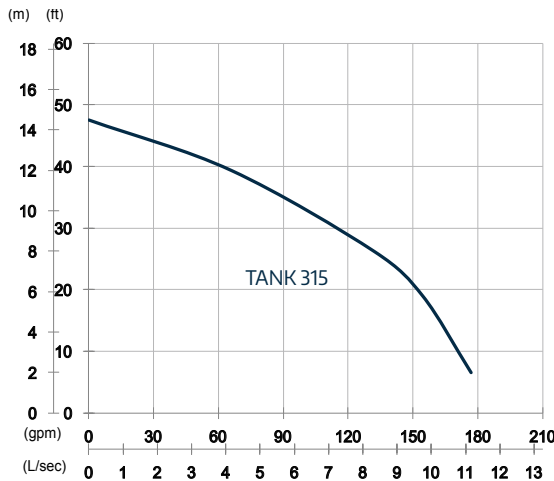

unit : mm

Weight : 33kg

Features

Pump Type

Electric Submersible Pumps
 1-Phase, 3-Phase

Motor

Type: Induction Motor
 Poles: 2 Pole
 Insulation: Class F
 Protector: Circle Thermal Protector
 Starter: 1-Phase · Capacitor-Run,
 3-Phase · D.O.L.

Lubricant

Food Grade (ISO VG32)

Impeller Type

Opened

Shaft Seal

Double Mechanical Seal
 Silicon Carbide VS Ceramic / Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified) / H07BQ-F
 10m or longer upon request

Materials

Pump Casing: Gray Iron
 Impeller: Chromium Iron
 Motor Frame: Stainless Steel
 Motor Shaft: Stainless Steel
 Strainer: Stainless Steel

Max. Liquid Temperature

40°C

Max. Submersion Depth

20m

pH Range

pH 5 - pH 8