

Side Channel pumps

Self-priming, segmental type with very low NPSH

CEH 1201 ... 6108

CEH 1202/5 ... 6108/5

CEH 1202/7 ... 6107/7



Technical data

Capacity:	from 0,4 up to 35 m ³ /h
Delivery head:	from 10 up to 354 m
Speed:	1450 rpm (max. 1800 rpm)
Temperature:	max. 120 °C
	max. 180 °C for high temperature design (higher temperatures upon request)
Casing pressure:	PN 40
Shaft sealing:	stuffing box or mechanical seal
Flange connections:	DIN 2501 / PN 40
Direction of rotation:	anti-clockwise, (when seen from the drive end)



Application

The Sterling SIHI CEH pump is a self-priming side channel pump capable of handling gas along with the medium and operates at a low noise level.

The CEH pumps are used for problem-free pumping of clean liquids at unfavourable suction side conditions. They are also very suitable for positive suction heads below 0.5m

The different material possibilities with uniform dimensions and performance characteristics as well as the standard exchangeable components, make the CEH particularly recommendable for applications in the pharmaceutical, chemical or petrochemical market as well as in the plastic or oil industry. Because of its low NPSH and positive suction head the CEH is very suitable for the pumping of liquefied gasses and liquids under vapour pressure like condensate, refrigerant, boiler feed water or LPG.

The pumps of the CEH /7 series have a retaining stage to avoid the dry running by controlling the liquid level in the pump. This design is especially developed for the handling of liquids under vapour pressure or when pumping from underground tanks. The series CEH /5 are used for bottom off-loading of liquids under vapour pressure.

Design

Pumps of the series CEH have a segmental type construction with open vane wheel impellers. The construction of the CEH pump is a so-called centrifugal combined system.

This combination pump is suited with a centrifugal stage in serial connection before the side channel stages to obtain a more favourable NPSH.

The program comprises 6 sizes each with 1-8 stages. The existing material design allows an optimum rating for the respectively desired performance range and the pumping medium.

Pumps of the series CEH /7 are equal to the CEH series but equipped with a retaining stage. This program comprises 6 sizes with 2-7 stages. The series CEH /5 have also 6 sizes but with 2-8 stages.

The applied hydraulic components are from our Modular Side Channel system (interchangeability of parts).

Construction

Casing pressure

Maximum 40 bar from -40 °C up to +120 °C.
Maximum 32 bar from +120 °C up to +180 °C.
Pressure stages for temperature as per DIN EN 1333.

Please observe

Technical rules and safety regulations:
Casing pressure = inlet pressure + delivery head at minimum pump capacity.

Position of branches

Axial suction branch, discharge branch points radially upwards

Flanges

The flanges correspond to DIN EN 1092-2 / PN 40.
Flange design as per DIN 2512 with groove or drilled according to ANSI 150 or 300 lbs is basically possible.

Bearing

One grease lubricated ball bearing according to DIN 625 and one liquid surrounded sleeve bearing (design A). The ball bearing is greased for life.

Direction of rotation

Anti-clockwise, when looking from the drive end.

Shaft sealing

The shaft can be sealed by a stuffing box or a mechanical seal conform DIN EN 12756.
The shaft sealing is also available in a design suitable for heating or cooling of the stuffing box or the mechanical seal.

Double mechanical seal (back-to-back as well as tandem) or a quench design with throttle bush are available upon request.
The CEH can also be supplied with a magnetic coupling (for information see the separate catalogue).

Material design CEH

Cast iron and Ductile iron

Pos	Components	0A	0B	0F	1A	1B	1F
1060	Suction casing						
1070	Discharge casing						
1080							
1090							
1140							
1141	Intermediate piece		EN-GJL-250				EN-GJS-400-18-LT
2100	Shaft			X 20 Cr 13			
2310	Impeller				EN-GJL-250		
2350	Vane wheel impeller	CuZn40Al2	G-X 3 CrNiMoCuN 26 6 3 3	PAEK	CuZn40Al2	G-X 3 CrNiMoCuN 26 6 3 3	PAEK
3500	Bearing housing				EN-GJL-250		
4410	Mechanical seal casing						
4510	Stuffing box casing		EN-GJL-250				EN-GJS-400-18-LT
0241	Bearing bush			CY 10 C / Carbon Antimony *			

* Bearing bush in Carbon Antimony is used only in the high temperature design. This high temperature design is also provided with cup springs and a cooled stuffing box or cooled mechanical seal.

Stainless steel

Pos	Components	4B	Material design	4F
1060	Suction casing			
1070	Discharge casing			
1080				
1090				
1140				
1141	Intermediate piece		G-X 6 CrNiMo 18 10	
2100	Shaft		X 5 CrNiMo 17 12 2	
2310	Impeller		G-X5 CrNiMoNb 18 10	
2350	Vane wheel impeller	G-X 3 CrNiMoCuN 26 6 3 3		PAEK
3500	Bearing housing		EN-GJL-250 coated	
4410	Mechanical seal casing		G-X 6 CrNiMo 18 10	
0241	Bearing bush		CY 10 C / Carbon Antimony *	

* Bearing bush in Carbon Antimony is used only in the high temperature design. This high temperature design is also provided with cup springs and a cooled stuffing box or cooled mechanical seal.

Casing seal

The casing can be sealed with a liquid sealing compound or soft Teflon.

Drive

By electric motor, type of construction IM B3.
For LPG, EExe or Eex d(e) motors are available.

General comments


Side Channel pumps with the same hydraulic construction are manufactured in series as:

- CEH** With magnetic coupling
- CEB** Vertical tank mounted pump, PN 25 with magnetic coupling
- CEV** Vertical tank mounted pump, PN 25 with mechanical seal (replacement of CVGP)
- AEH** High duty pump, PN 40
Also available with magnetic coupling
- AKH** Medium duty pump, PN 16
- AOH** Low duty pump with oval flanges, PN 10

Technical documents about these pump series will be readily supplied on request.

Sectional drawing and parts list CEH (typical)

CEHA with stuffing box



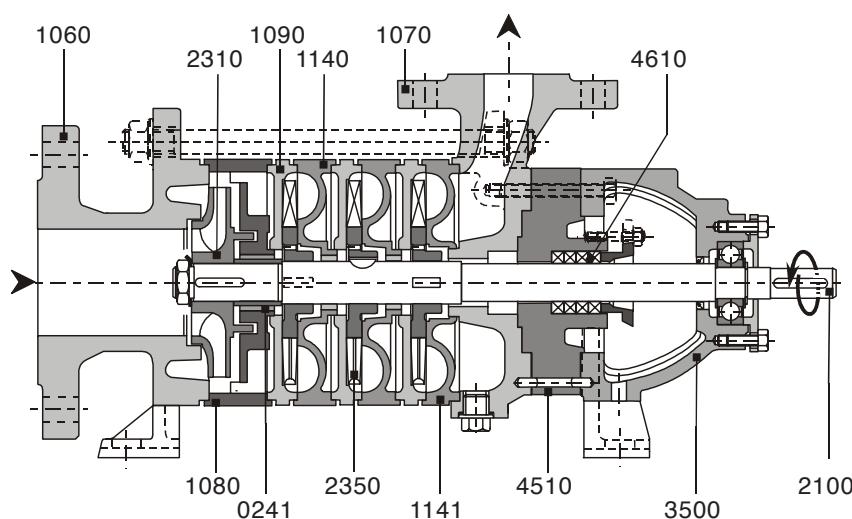


Pos. Components


0241	Bearing bush
1060	Suction casing
1070	Discharge casing
1080	Intermediate piece
1081	Retaining stage
1090	Suction intermediate piece
1140	Discharge intermediate piece
1141	Discharge intermediate piece
2100	Shaft
2310	Impeller
2350	Vane wheel impeller
3500	Bearing housing
4330	Mechanical seal
4410	Mechanical seal casing
4420	Cooling insert
4510	Stuffing box casing
4610	Stuffing box

CEH with mechanical seal

Unbalanced as well as balanced mechanical seals are available.

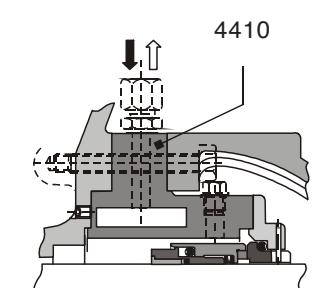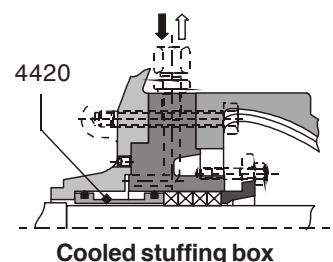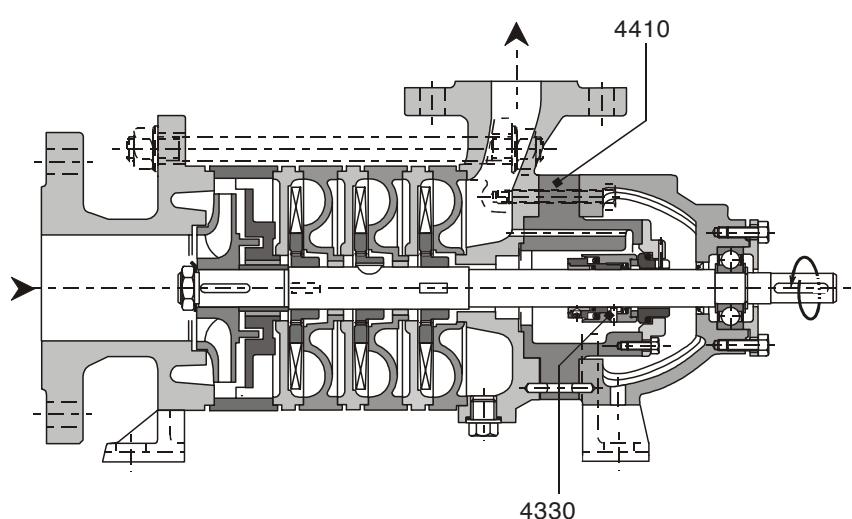

CEH /7 with retaining stage

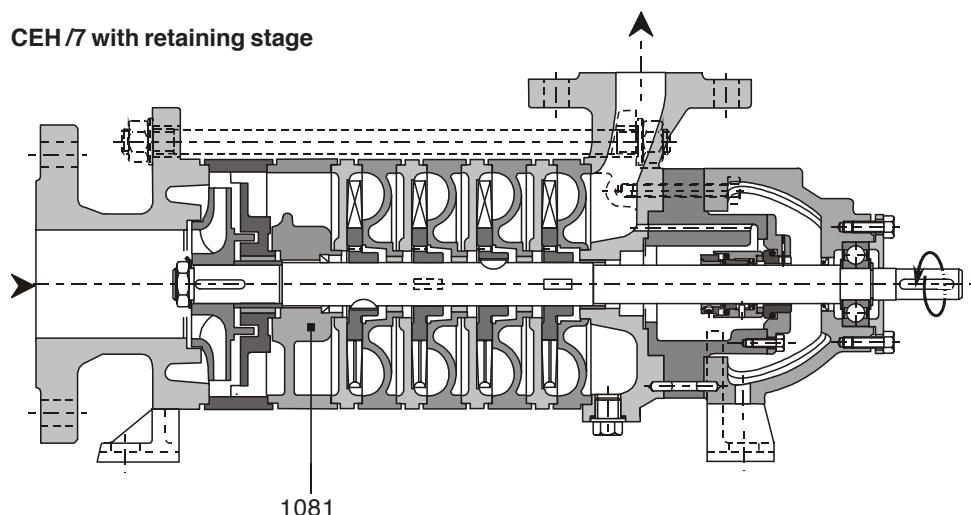


All possible design combinations can be found in the delivery program

Operating principle CEH

The CEH pump or so-called centrifugal combined system (combination pump) is suited with a low NPSH centrifugal impeller before the side channel stages (series connection). This NPSH inducer stage creates enough pressure to overcome the entrance pressure loss of the first side channel stage or NPSH required.


A side channel stage consist of:

- a suction intermediate piece with the suction port,
- a discharge intermediate piece with the side channel, the air displacement channel at the end of the side channel, the discharge port and the gas slot,
- a vane wheel impeller enclosed by the two intermediate pieces.

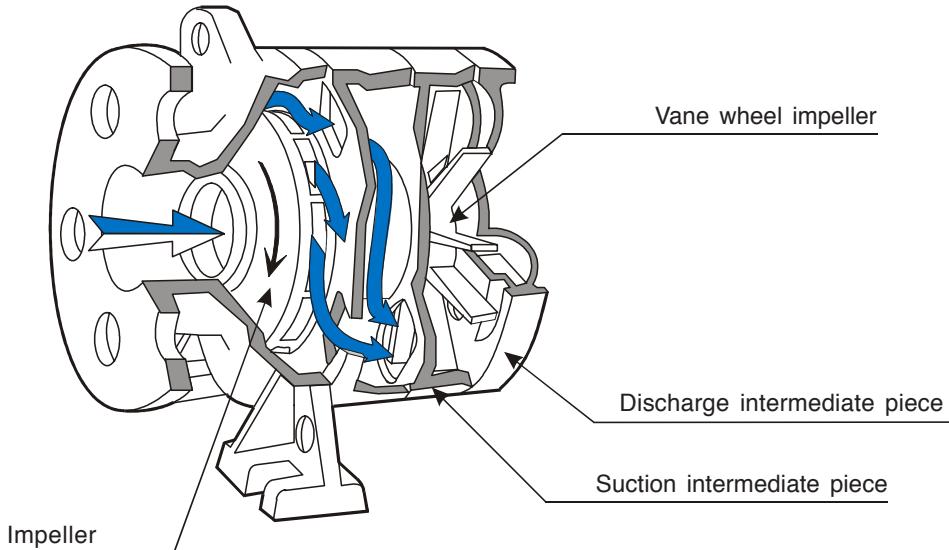

The turning of the vane wheel impeller creates an under pressure at the beginning of the side channel (centrifugal effect) and the gas or liquid with gas is drawn in. The air displacement channel provokes a **positive displacement** effect so the gas remaining at the root of the vane wheel impeller is forced out through the gas slot.

The pressure generating is obtained by the repetitive re-entering of the liquid in the side channel (**corkscrew movement**).

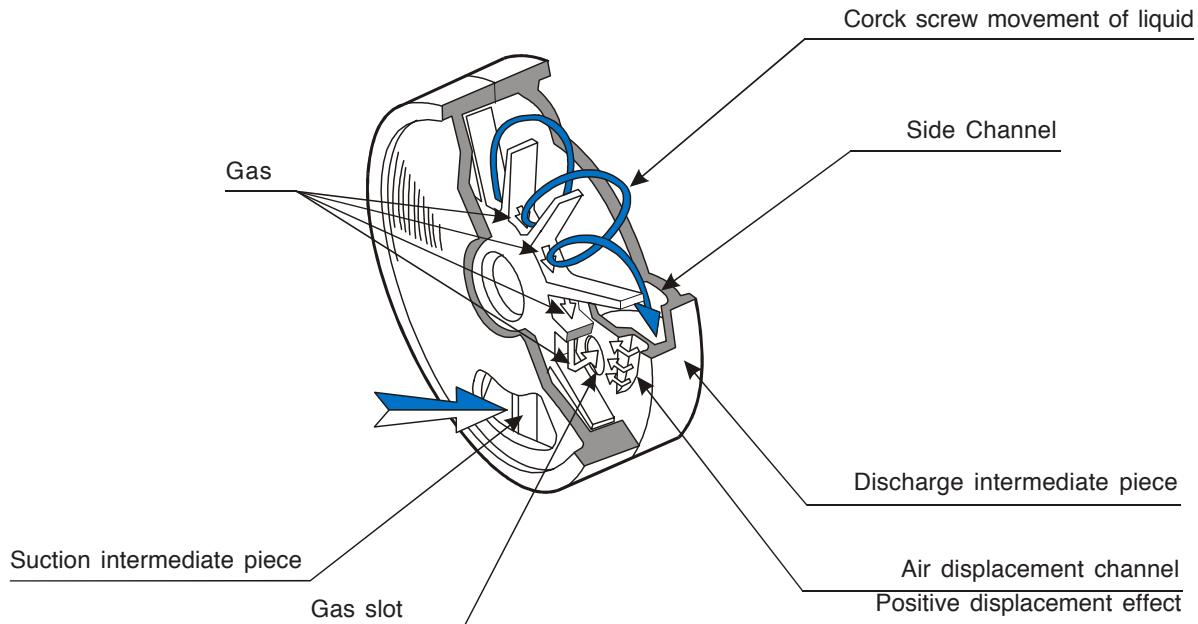

A side channel pump can de-aerate and degas the suction line by itself and is thus very suitable for suction lift operation. A side channel pump can handle large quantities of (entrained) gas. Mixtures up to a gas share of 50% are possible. The ability for self-priming and the handling of large amounts of (entrained) gas, will guarantee continuous operation even in case of evaporation and therefore contribute to a higher level of safety in industrial processes.

To avoid cavitation the distance between the liquid level and the entrance at the suction side of the pump is restricted. This distance is related to the NPSH or Net Positive Suction Head. The NPSH for CEH pumps is very low due to its special construction. The axial entrance and its larger diameter results in a less disturbed flow and lower friction losses. Together with the low NPSH of the centrifugal impeller the CEH can handle a positive suction head of less than 0.5 m.

This makes the CEH very suitable for pumping liquids near their boiling point at reasonable economic expenses and the low NPSH guarantees also full output capacity because of operation without cavitation.

Performance range CEH

General conditions

Liquid:	Water
Density:	1 kg/dm ³
Viscosity:	1 cSt
Temperature:	20 °C
Atmospheric pressure:	1013 mbar



Characteristic tolerances

Capacity ± 5% - Delivery head ± 5% - Power + 10%

For designs with a mechanical seal or a casing seal of soft Teflon, the tolerance for the delivery head is extended by 2% each.

Measuring standard



According to ISO 5198

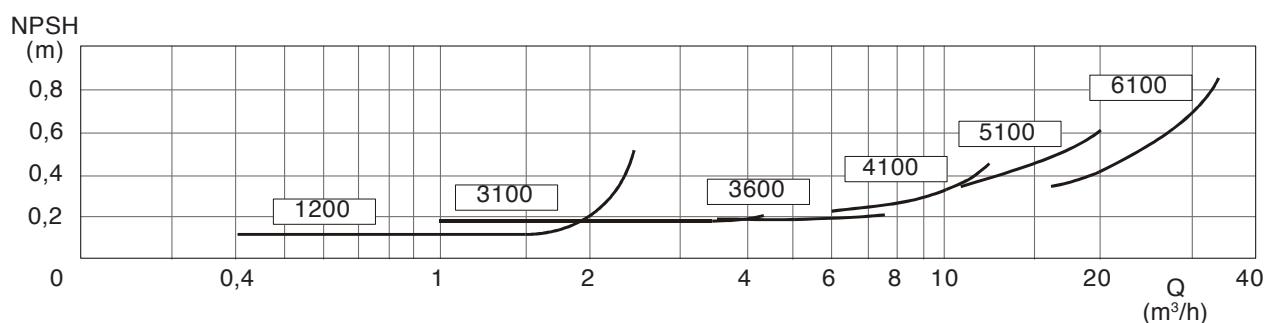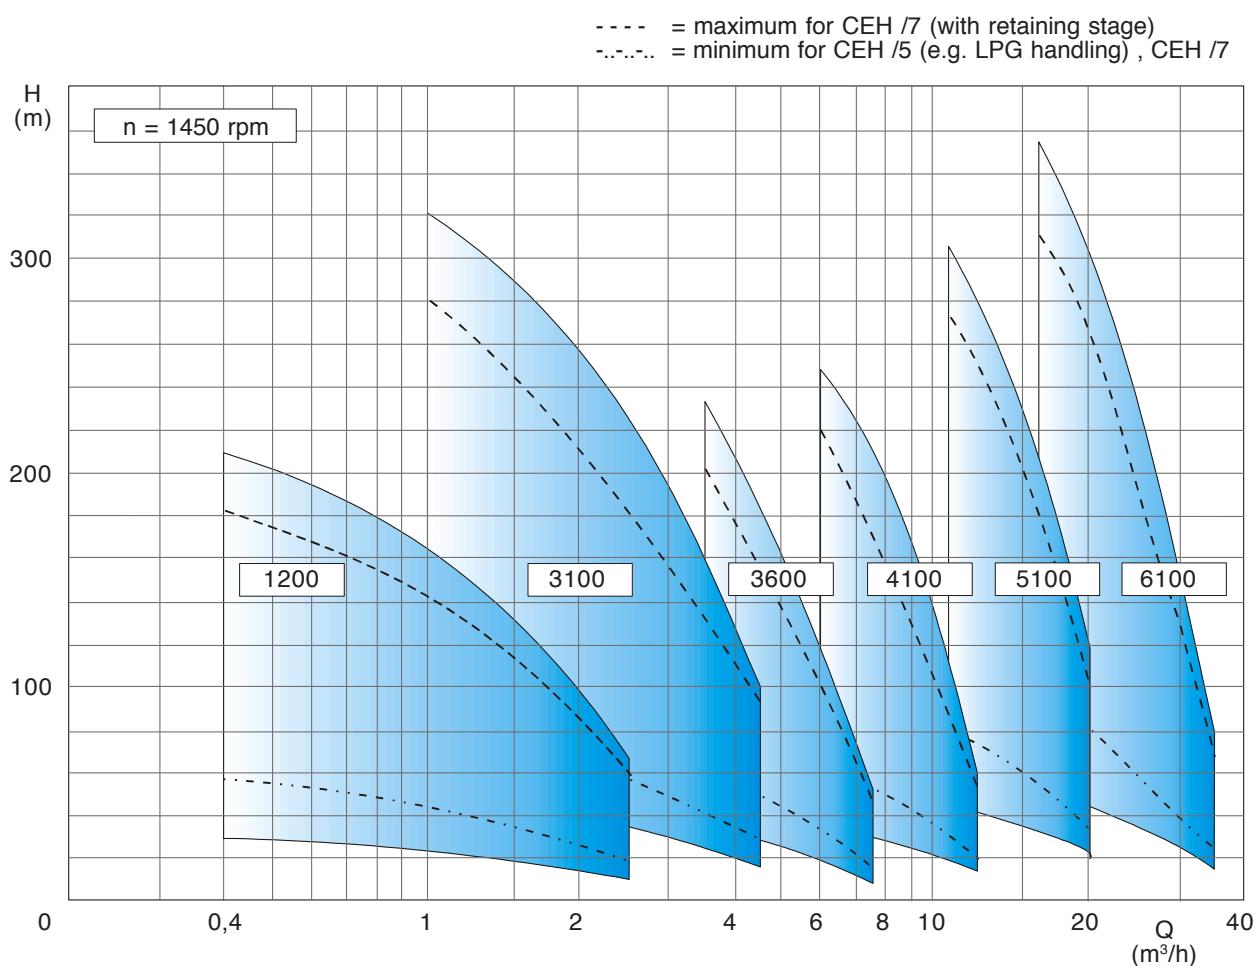

The NPSH curve is suitable for liquids without gas. When using a liquid containing gas (e.g. water 20 °C) a safety margin of 1 m has to be added.

Dimension chart, Pump set drawing and Performance curves

CEH 1200 and CEHA 1200/5

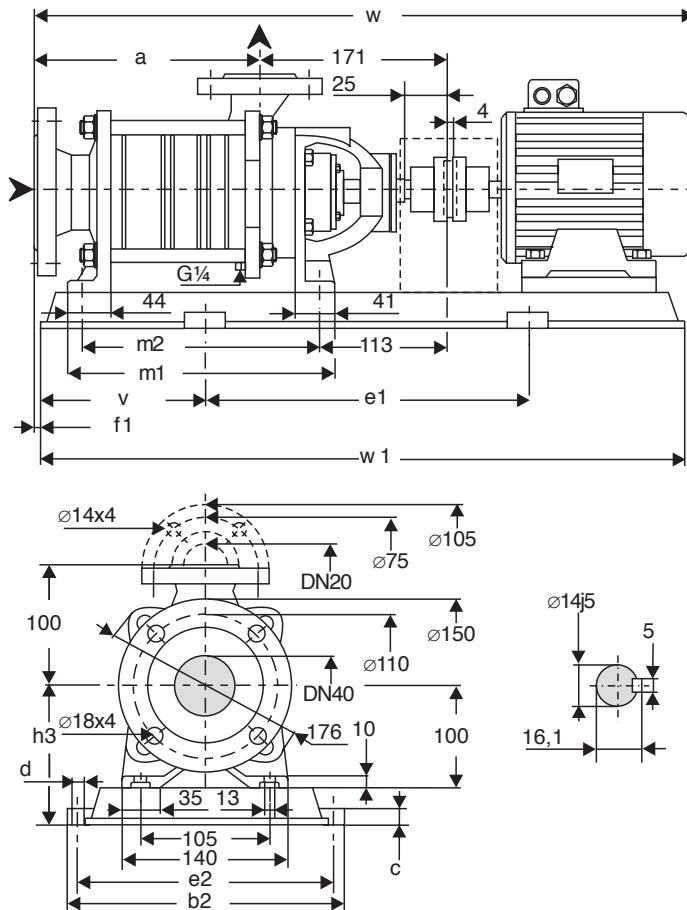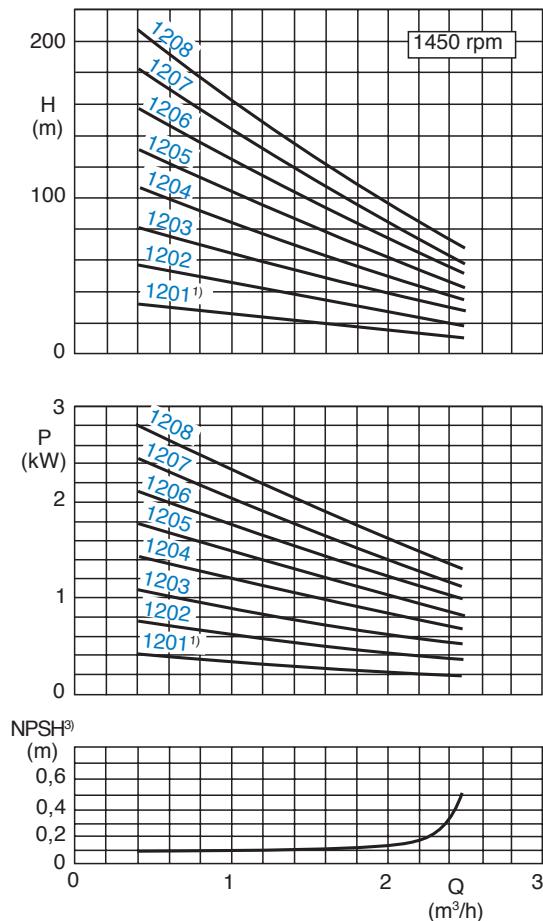

General: Values are valid for water $\rho = 1 \text{ kg/dm}^3$ and $v = 1 \text{ cSt}$.

Design tolerances: Capacity $\pm 5\%$ - Delivery head $\pm 5\%$ - Power $+10\%$.
For designs with a mechanical seal or casing seal of soft Teflon,
the tolerance for the delivery head is extended by 2% each.

* Dimensions depend upon the motor brand.

¹⁾ Not for design CEH /5.

²⁾ For EExe II T3 motors.



³⁾ A safety margin of 1 m has to be added when using a liquid containing gas.

Pump size	Motor kW	Motor kW ²⁾	size	Base plate	Coupling B	BDS ²⁾	Weight pump set	a	b2	c	d	e1	e2	v	f1	h3	m1	m2	w*	w1	
1201	0.37	1)	71	P007	68	1)	18	39	195	317	20	15	350	285	110	-9	135	238	204	609	570
	0.55		80	P008				45	297	297			400	265	120		140		204	643	640
1202	0.55	0.55	80	P008	68	76	20	47	229	297	20	15	400	265	120	-9	140	272	238	677	640
	0.75	0.75	80					44		330	25	19	480	290	125					735	730
	1.1	1	90S	P241	68	76	22	52	263	300	25	19	420	260	115	-9	165	306	272	711	650
1203	0.75	0.75	80					58		330			480	290	125					769	730
	1.1	1	90S					62													
	1.5	1.35	90L					60	297	330	25	19	480	290	125	-9	165	340	306	803	730
1204	1.1	1	90S	P241	68	76	24	64		360	25	19	540	320	140					844	820
	1.5	1.35	90L					75													
	2.2	2	100L					72	331	360	25	19	540	320	140	-9	165	374	340	837	820
1205	1.1	1	90S	P272	68	76	26	70									878				
	1.5	1.35	90L					77													
	2.2	2	100L					88													
1206	1.5	1.35	90L	P272	68	76	28	84	365	360	25	19	540	320	140	-9	165	408	374	871	820
	2.2	2	100L					85		361	15	15	600	325	160		150			912	920
	3	2.5	100L					87												905	920
1207	1.5	1.35	90L	P015	68	76	30	74	399	361	25	15	600	325	160	-9	150	442	408	946	920
	2.2	2	100L					86													
	3	2.5	100L					88													
1208	2.2	2	100L	P015	80	88	32	88	433	361	25	15	600	325	160	-9	150	476	442	980	920
	3	2.5	100L					89													

The weight of the pump will be approximately 6% higher when using Stainless steel.

Dimension chart, Pump set drawing and Performance curves

CEH 3100 and CEHA 3100/5

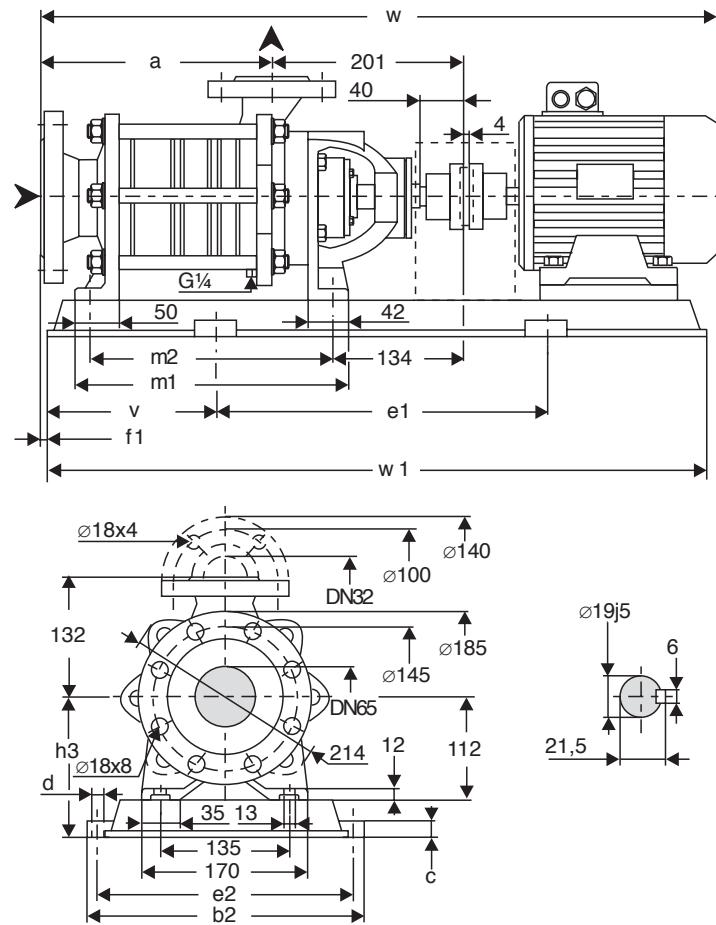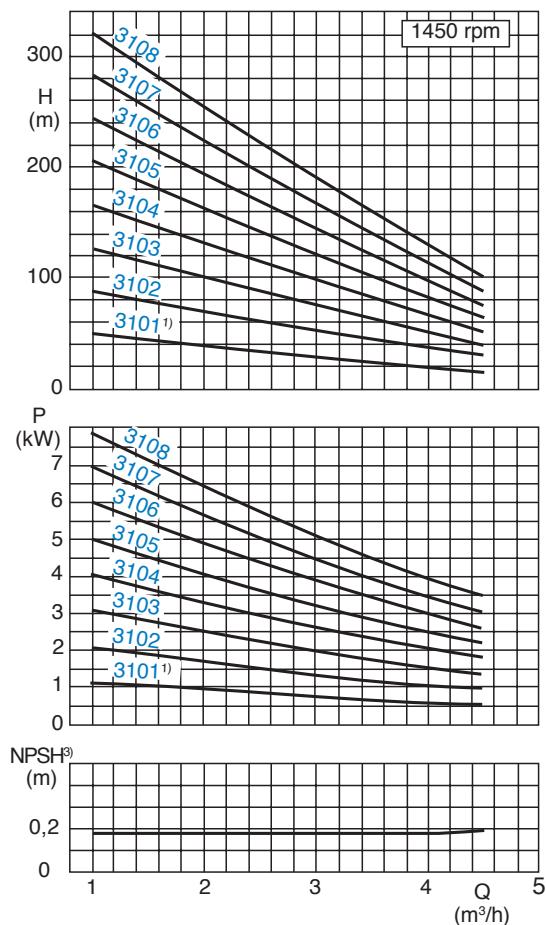

General: Values are valid for water $\rho = 1 \text{ kg/dm}^3$ and $\nu = 1 \text{ cSt}$.

* Dimensions depend upon the motor brand.

¹⁾ Not for design CEH /5.

²⁾ For EExe II T3 motors.



³⁾ A safety margin of 1 m has to be added when using a liquid containing gas.

Pump size	Motor kW	Motor kW ²⁾	size	Base plate	Coupling BDS ²⁾	Weight pump set	a	b2	c	d	e1	e2	v	f1	h3	m1	m2	w*	w 1	
3101	0.75	1)	80	P008	68	31	60	213	297	20	15	400	265	120	-13	152	261	227	691	640
	1.1		90S	P241			67	330	25	19	480	290	125	-13	177	177	177	749	730	
3102	1.1	1	90S	P241	68	78	72	253	330	25	19	480	290	125	-13	177	301	267	789	730
	1.5	1.35	90L	P241	74	34	74	360	540	320	140	-	-	-	-	-	-	830	820	
	2.2	2	100L	P272			81	360	540	320	140	-	-	-	-	-	-	830	820	
3103	2.2	2	100L	P272	80	88	89	293	360	25	19	540	320	140	-13	177	341	307	870	820
	3	2.5	100L	P272	80	88	90	360	540	320	140	-	-	-	-	-	-	910	820	
	4	3.6	112M	P015			93	333	360	25	19	540	320	140	-13	177	381	347	931	920
3104	2.2	2	100L	P272	80	88	94	333	360	25	19	540	320	140	-13	177	381	347	910	820
	3	2.5	100L	P272			117	361	540	320	140	-	-	-	-	-	-	931	920	
	4	3.6	112M	P015			117	361	540	320	140	-	-	-	-	-	-	931	920	
3105	3	2.5	100L	P015	80	88	102	373	361	25	15	600	325	160	-13	162	421	387	950	920
	4	3.6	112M	P015	95	103	120	373	361	25	15	600	325	160	-13	162	421	387	971	920
	5.5	5	132S	P017			158	373	361	25	15	700	325	200	-	192	421	387	1047	1100
3106	4	3.6	112M	P015	80	88	123	413	361	25	15	600	325	160	-13	162	461	427	1011	920
	5.5	5	132S	P017	95	103	161	413	361	25	15	700	325	200	-13	192	461	427	1087	1100
	7.5	6.8	132M	P017			171	413	361	25	15	700	325	200	-13	192	461	427	1113	1100
3107	4	3.6	112M	P017	80	88	143	453	361	25	15	700	325	200	-13	172	501	467	1051	1100
	5.5	5	132S	P017	95	103	165	453	361	25	15	700	325	200	-13	192	501	467	1127	1100
	7.5	6.8	132M	P017			205	493	361	25	15	700	325	200	-13	192	541	507	1153	1100
3108	5.5	5	132S	P017	95	103	198	493	361	25	15	700	325	200	-13	192	541	507	1167	1100
	7.5	6.8	132M	P017	95	103	208	540	361	30	24	840	490	215	-13	240	541	507	1193	1100
	11	10	160M	P436			253	540	361	30	24	840	490	215	-13	240	541	507	1285	1270

The weight of the pump will be approximately 6% higher when using Stainless steel.

Dimension chart, Pump set drawing and Performance curves

CEH 3600 and CEHA 3600/5

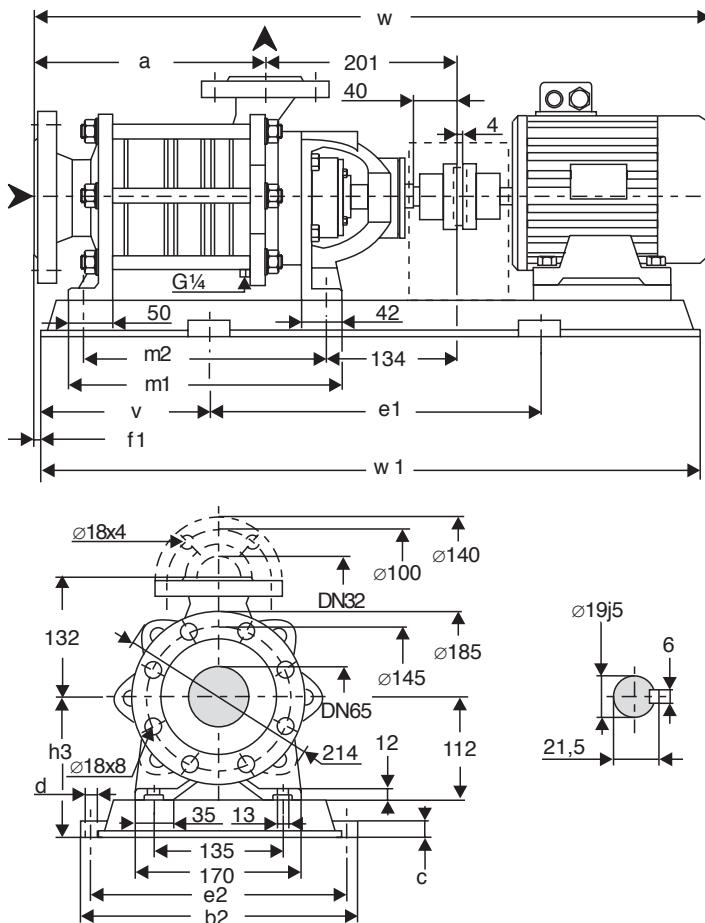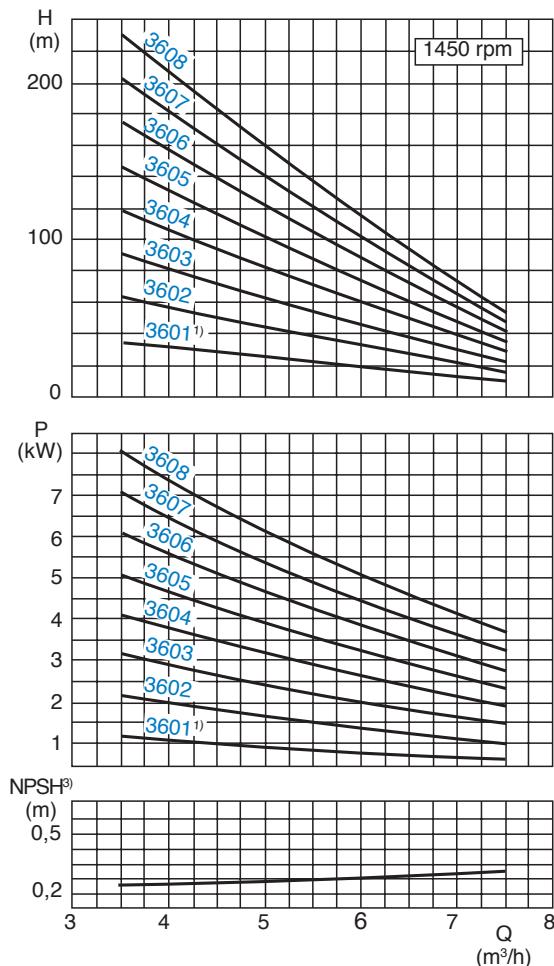

General: Values are valid for water $\rho = 1 \text{ kg/dm}^3$ and $\nu = 1 \text{ cSt}$.

Design tolerances: Capacity $\pm 5\%$ - Delivery head $\pm 5\%$ - Power $+10\%$.
For designs with a mechanical seal or casing seal of soft Teflon, the tolerance for the delivery head is extended by 2% each.

* Dimensions depend upon the motor brand.

1) Not for design CEH /5.

2) For EExe II T3 motors.



3) A safety margin of 1 m has to be added when using a liquid containing gas.

Pump size	Motor kW ²⁾	Motor size	Base plate	Coupling B	BDS ²⁾	Weight pump set	a	b2	c	d	e1	e2	v	f1	h3	m1	m2	w*	w1			
3601	0.75	1) 90S	80	P008	1)	55	213	297	20	15	400	265	120	-13	152	261	227	691	640			
	1.1		68	P241		31	67	330	25	19	480	290	125	-13	177	261	227	749	730			
	1.5	90L				74																
3602	1.5	1.35	90L	P241	68	76	34	74	253	330	25	19	480	290	125	-13	177	301	267			
	2.2	2	100L	P272	80	88		89	360				540	320	140	-13	177	301	267			
3603	2.2	2	100L	P272	80	88	38	89									789	730				
	3	2.5	100L					101	293	360	25	19	540	320	140	-13	177	341	307			
	4	3.6	112M					119										870	820			
3604	3	2.5	100L	P272	80	88	42	105	333	360	25	19	540	320	140	-13	177	381	347			
	4	3.6	112M	P015				117		361		15	600	325	160	-13	162		910			
	5.5	5	132S					152										931	920			
3605	3	2.5	100L	P015	80	88	45	102	373	361	25	15	600	325	160	-13	162	421	387			
	4	3.6	112M	P015				120		373		171	700	325	200	-13	192		950			
	5.5	5	132S					171										971	920			
3606	4	3.6	112M	P015	80	88	48	123	413	361	25	15	600	325	160	-13	162	461	427			
	5.5	5	132S	P017				161		413		171	700	325	200	-13	192		1087			
	7.5	6.8	132M					171										1113	1100			
3607	5.5	5	132S	P017	95	103	52	165	453	361	25	15	700	325	200	-13	192	501	467			
	7.5	6.8	132M	P017				168		453		171	840	325	200	-13	192		1127			
	5.5	5	132S	P017				161		493		171	490	325	200	-13	192		1153			
3608	7.5	6.8	132M	P017				171	254	540	30	24	840	490	215	-13	192	541	507			
	11	10	160M	P436				254		540		24	840	490	215	-13	192		1167			
															1193	1100						
																	1285	1270				

The weight of the pump will be approximately 6% higher when using Stainless steel.

Dimension chart, Pump set drawing and Performance curves

CEH 4100 and CEHA 4100/5

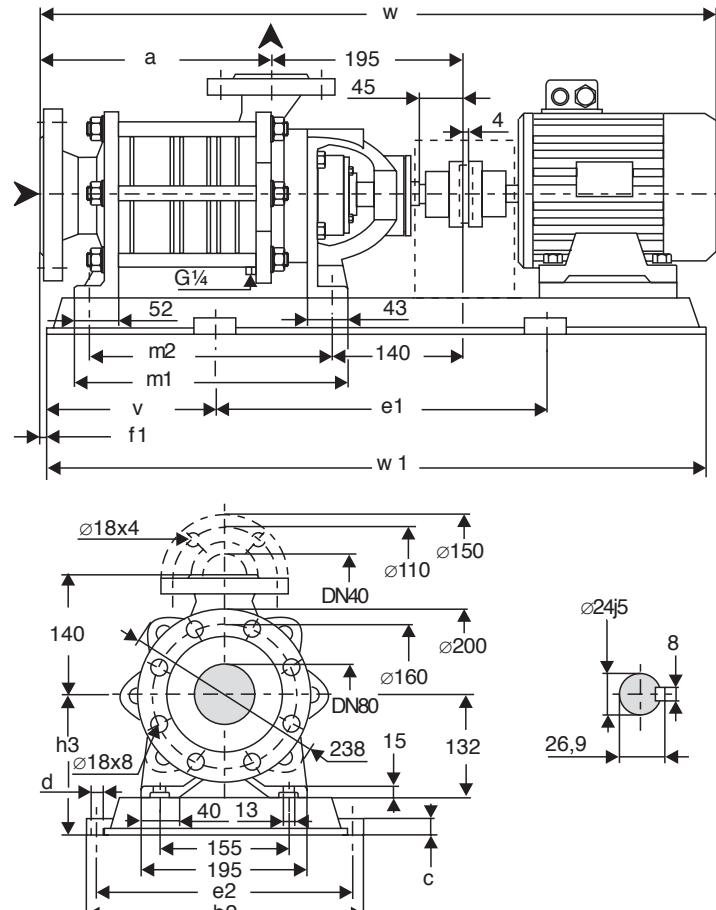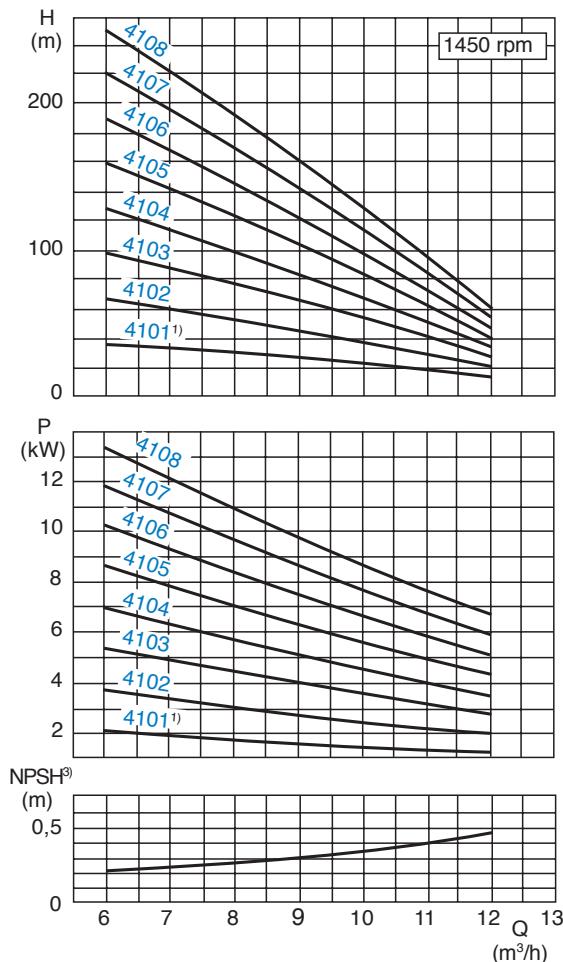

General: Values are valid for water $\rho = 1 \text{ kg/dm}^3$ and $v = 1 \text{ cSt}$.

Design tolerances: Capacity $\pm 5\%$ - Delivery head $\pm 5\%$ - Power $+10\%$.
For designs with a mechanical seal or casing seal of soft Teflon, the tolerance for the delivery head is extended by 2% each.

* Dimensions depend upon the motor brand.

¹⁾ Not for design CEH 5/.

²⁾ For EEx II T3 motors.



³⁾ A safety margin of 1 m has to be added when using a liquid containing gas.

Pump size	Motor kW	Motor kW ²⁾	Motor size	Base plate	Coupling B	BDS ²⁾	Weight pump set	a	b2	c	d	e1	e2	v	f1	h3	m1	m2	w*	w1
4101	1.5	1)	90L	P241	68	1)	41	81	268	330	25	19	480	290	125	-23	197	294	798	730
	2.2		100L	P272	80			95		360	540	320	140	-23	197	260			839	820
4102	2.2	2	100L	P272	80	88	47	98	323	360	25	19	540	320	140	-23	197	349	894	820
	3	2.5	100L					110		110	540	320	140	-23	197	315				915
	4	3.6	112M					128		128	238	15	132	160	200	-23	182	192	404	370
4103	4	3.6	112M	P015	80	88	53	128	378	361	25	15	600	325	160	-23	192	404	970	920
	5.5	5	132S	P017	95	103		179		361	700	320	200	-23	182	192			1046	1100
4104	5.5	5	132S	P017	95	103	59	172	433	361	25	15	700	325	200	-23	192	459	1101	1127
	7.5	6.8	132M					182		433	238	15	195	200	240				425	1127
4105	5.5	5	132S	P017	95	103	65	178	488	361	25	15	700	325	200	-23	192	514	480	1156
	7.5	6.8	132M					181		488	490	30	24	740	440	200			1182	1100
4106	11	10	160M	P385	95	103	70	196	543	490	30	24	840	440	200	-23	212	569	1237	1140
	11	10	160M	P436				269		543	540	30	24	840	490	215			535	1329
4107	7.5	6.8	132M	P385	95	103	76	202	598	540	30	24	840	490	215	-23	212	624	1292	1270
	11	10	160M	P436				275		598	610	35	28	940	550	240			590	1384
	15	13.5	160L	P487	110	118		349		610	35	28	940	550	240	260			1446	1420
4108	11	10	160M	P487	95	103	82	281	653	610	35	28	940	550	240	-23	260	679	1439	1420
	15	13.5	160L	P487				355		653	110	118	281	355	240				645	1501

The weight of the pump will be approximately 6% higher when using Stainless steel.

Dimension chart, Pump set drawing and Performance curves

CEH 5100 and CEHA 5100/5

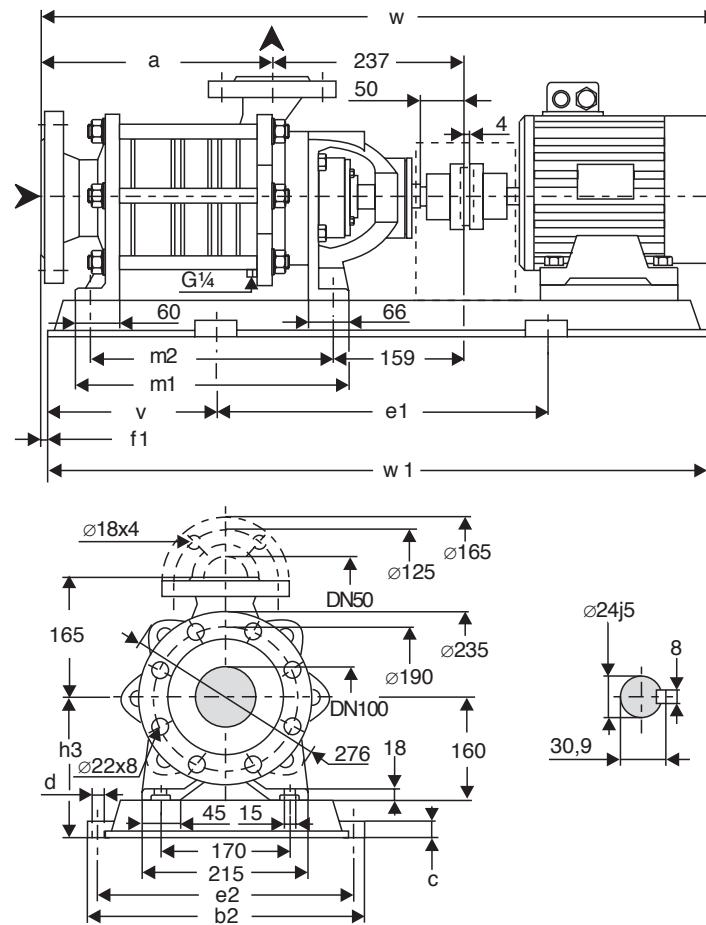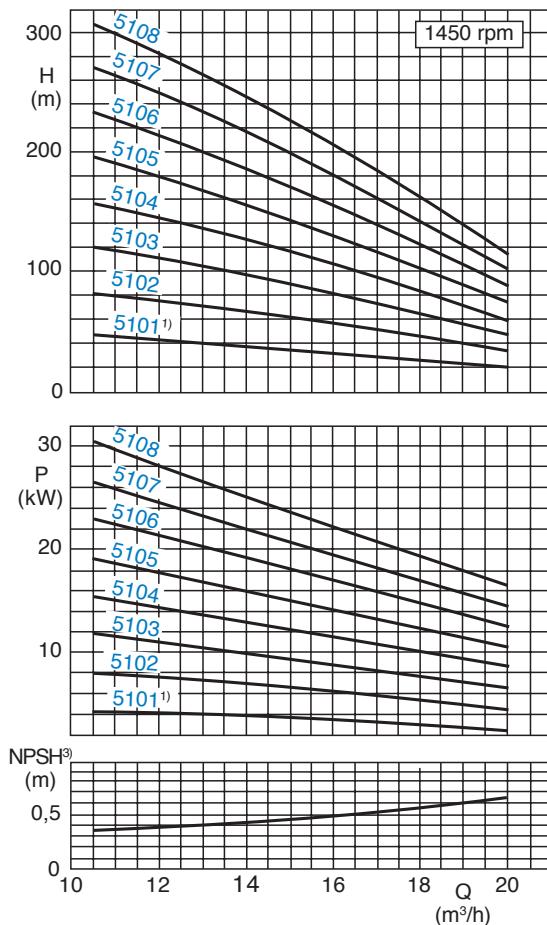

General: Values are valid for water $\rho = 1 \text{ kg/dm}^3$ and $v = 1 \text{ cSt}$.

* Dimensions depend upon the motor brand.

Design tolerances: Capacity $\pm 5\%$ - Delivery head $\pm 5\%$ - Power $+ 10\%$.
For designs with a mechanical seal or casing seal of soft Teflon,
the tolerance for the delivery head is extended by 2% each.

¹⁾ Not for design CEH /5.

²⁾ For EEx II T3 motors.



³⁾ A safety margin of 1 m has to be added
when using a liquid containing gas.

Pump size	Motor kW ²⁾	Motor kW ²⁾	Base plate size	Coupling B BDS ²⁾	pump set	a	b2	c	d	e1	e2	v	f1	h3	m1	m2	w*	w1
5101	3	1)	100L	P272	80	123	360	25	19	540	320	140	-28	225	353	315	918	820
	4		112M	P015		162	305		15	600	325	160		210			939	920
	5.5		132S			170											1015	
5102	5.5	5	132S	P017	95	103	183	25	15	700	325	200	-28	220	428	390	1090	1100
	7.5	6.8	132M				380		193	361	24	740		240			1116	
	11	10	160M	P385					269	490	30	440					1208	1140
5103	7.5	6.8	132M	P017	95	103	196	25	15	700	325	200	-28	220	503	465	1191	1100
	11	10	160M	P385			279		455	490	30	440		240			1283	
	15	13.5	160L	P436		110	353		540		24	840					1345	1270
5104	11	10	160M	P436	95	103	289	30	24	840	490	215	-28	240	578	540	1358	1420
	15	13.5	160L				530		363	540	30	490					1420	1270
	15	13.5	160L	P487		110	374										1495	
5105	15	13.5	160L		110	118	395	35	28	940	550	240	-28	260	653	615	1495	
	18.5	15	180M	P487			605		395	610	35	550		280			1557	1420
	22	17.5	180L			125	415										1495	
5106	15	13.5	160L	P487	110	118	384	35		940	550	240	-28	260	728	690	1570	1420
	18.5	15	180M				423										1632	
	22	17.5	180L	P538		125	425			680	660	35		300			1690	
	30	24	200L				506										1765	
5107	18.5	15	180M		110	118	415	28		1060	600	280	-28	280	803	765	1707	1620
	22	17.5	180L	P538			435			755	660	35		300			1765	
	30	24	200L			125	516										1765	
5108	22	17.5	180L	P538	125	135	446	40	28	1060	600	280	-28	280	878	840	1782	1620
	30	24	200L	S389			527			830	540	40		300			1840	1800

The weight of the pump will be approximately 6% higher when using Stainless steel.

Dimension chart, Pump set drawing and Performance curves

CEH 6100 and CEHA 6100/5

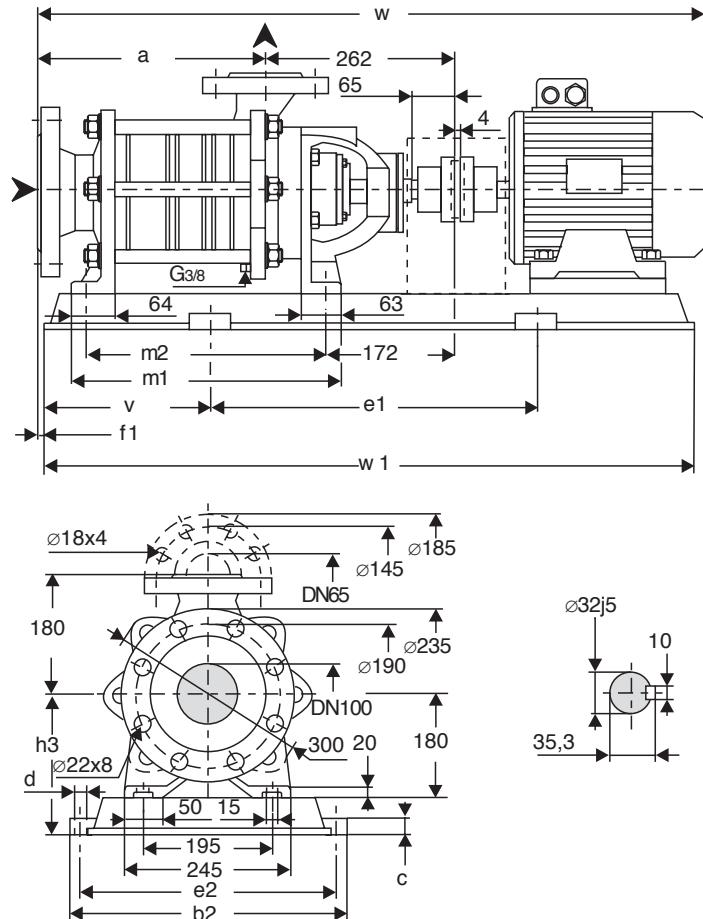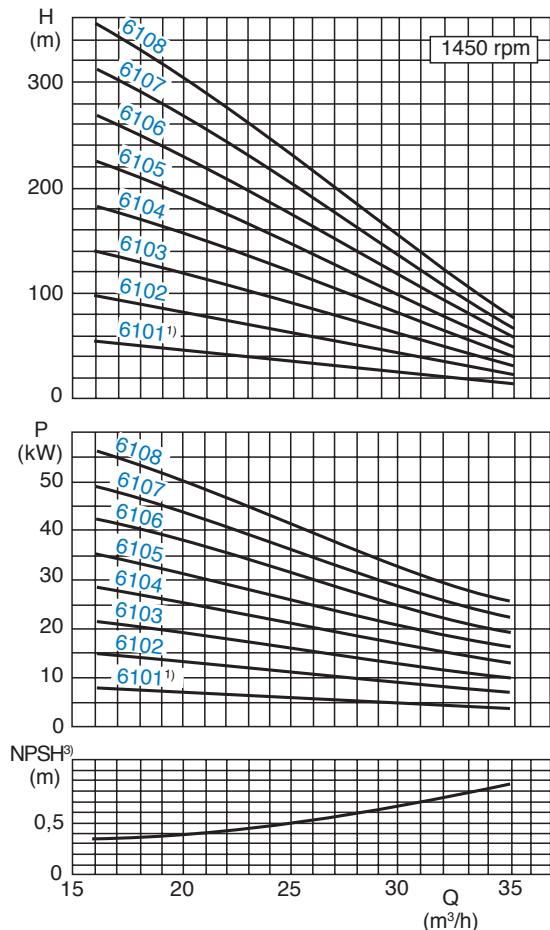

General: Values are valid for water $\rho = 1 \text{ kg/dm}^3$ and $\nu = 1 \text{ cSt}$.

* Dimensions depend upon the motor brand.

Design tolerances: Capacity $\pm 5\%$ - Delivery head $\pm 5\%$ - Power $+10\%$.

¹⁾ Not for design CEH /5.

For designs with a mechanical seal or casing seal of soft Teflon,
the tolerance for the delivery head is extended by 2% each.

²⁾ For EExe II T3 motors.


³⁾ A safety margin of 1 m has to be added
when using a liquid containing gas.

Pump size	Motor		Base plate	Coupling		Weight	a	b2	c	d	e1	e2	v	f1	h3	m1	m2	w*	w1	
	kW	kW ²⁾		B	BDS ²⁾	pump set														
6101	5.5	1)	132S	P017	95	1)	206	338	361	25	15	700	325	200	-35	240	391	353	1073	1100
	7.5		132M		103		203												1099	
6102	11	10	160M	P385	95	103	291	428	490	30	24	740	440	200	-35	260	481	443	1281	1140
	15	13.5	160L	P436	110	118	365												1343	1270
6103	18.5	15	180M	P487	110	118	404	518	610	35	28	940	550	240	-35	280	571	533	1495	1420
	22	17.5	180L		125	135	419													
6104	22	17.5	180L	P487	125	135	431	608	610	35	28	940	550	240	-35	280	661	623	1585	1420
	30	24	200L	P538	125	135	512												1643	1620
6105	30	24	200L	P538	125	135	525	698	660	35	28	1060	600	280	-35	300	751	713	1733	1620
	37	30	225S		140	152	594												1798	
6106	30	24	200L	P538	125	135	537	788	660	35	28	1060	600	280	-35	300	841	803	1823	1620
	37	30	225S	S609	140	152	606												1888	1820
	45	36	225M	S609	140	152	670													
6107	30	24	200L	S389	125	135	550	878	540	40	28	1200	490	300	-35	300	931	893	1913	1800
	37	30	225S	S609	140	152	619												1978	1820
	45	36	225M				683													
6108	37	30	225S	14211	140	152	532	968	740	40	28	1300	690	350	-35	345	1021	983	2003	2000
	45	36	225M				630												2080	
	55	44	250M	14212	160	-	701												2125	2100

The weight of the pump will be approximately 6% higher when using Stainless steel.

Dimension chart, Pump set drawing and Performance curves

CEHA 1200/7 (with retaining stage)

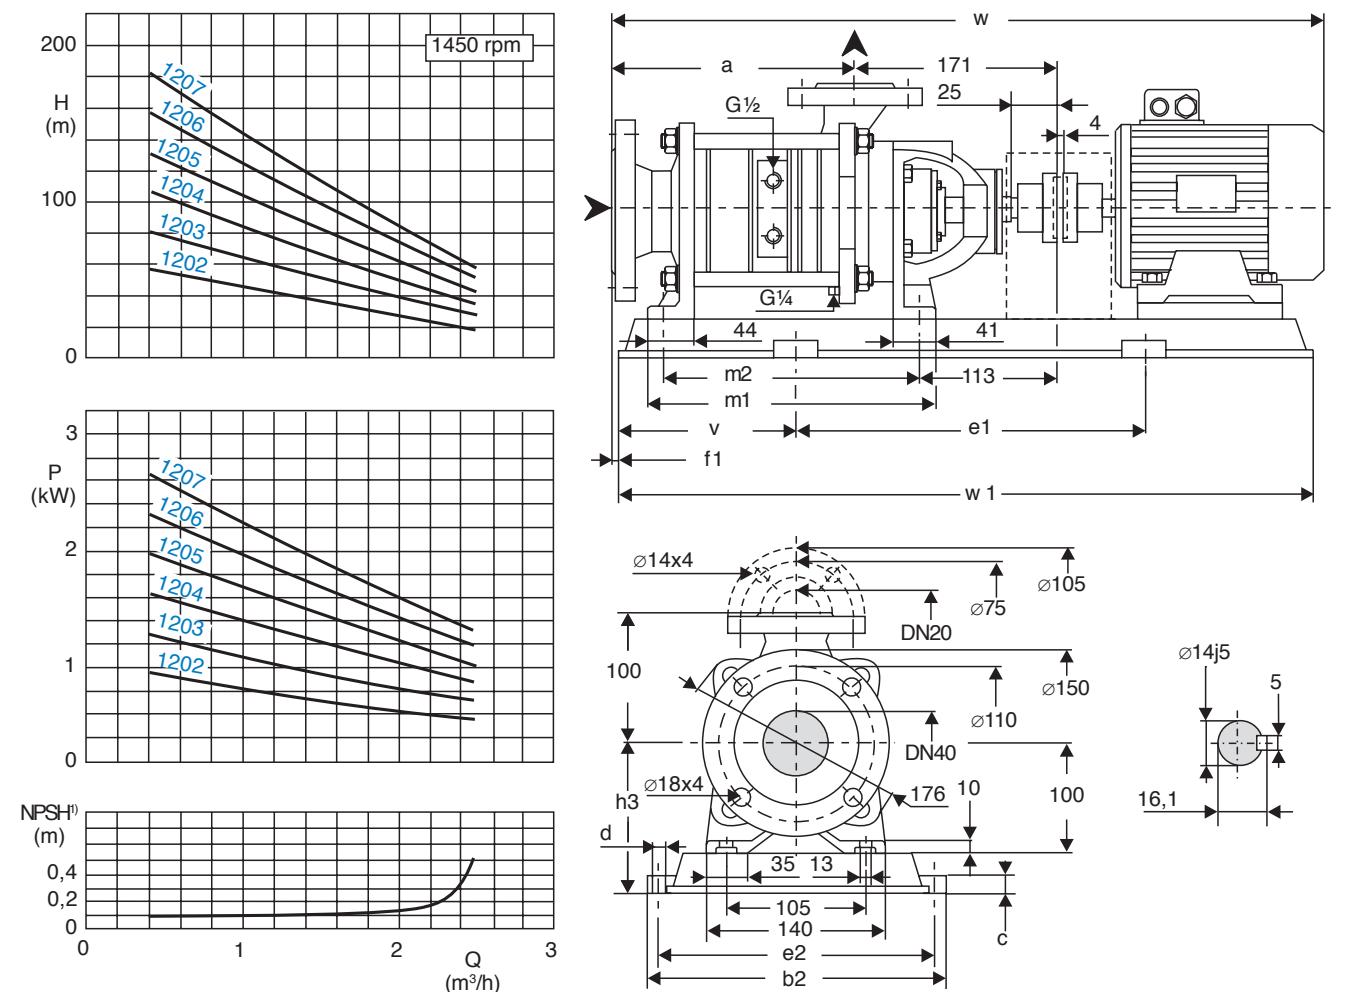

General: Values are valid for water $\rho = 1 \text{ kg/dm}^3$ and $\nu = 1 \text{ cSt}$.

Design tolerances: Capacity $\pm 5\%$ - Delivery head $\pm 5\%$ - Power $+10\%$.
For designs with a mechanical seal or casing seal of soft Teflon, the tolerance for the delivery head is extended by 2% each.



Pump size	Motor size		Base plate	Coupling	Weight pump set		a	b2	c	d	e1	e2	v	f1	h3	m1	m2	w*	w1
1202/7	0.55	80	P210	BDS76	22	52	263	300	25	19	420	260	115	-9	165	306	272	709	650
	0.75	80					297	330	25	19	480	290	125	-9	165	340	306	743	730
1203/7	0.75	80	P241	BDS76	24	54	331	360	25	19	540	320	140	-9	165	374	340	830	820
	1.1	90S					365	360	25	19	540	320	140	-9	165	408	374	864	820
1204/7	1.1	90S	P272	BDS76	26	70	399	361	25	15	600	325	160	-9	150	442	408	922	896
	1.5	90L					361	360	25	15	600	325	160	-9	150	476	442	932	920
1205/7	1.5	90L	P272	BDS76	28	84	433	361	25	15	600	325	160	-9	150	476	442	922	900
	2	100L					433	361	25	15	600	325	160	-9	150	476	442	932	920
1206/7	1.5	90L	P015	BDS76	30	69	433	361	25	15	600	325	160	-9	150	442	408	920	900
	2	100L					433	361	25	15	600	325	160	-9	150	476	442	932	920
1207/7	1.5	90L	P015	BDS76	32	91	433	361	25	15	600	325	160	-9	150	476	442	932	920
	2	100L					433	361	25	15	600	325	160	-9	150	476	442	932	920

¹⁾ A safety margin of 1 m has to be added when using a liquid containing gas.

* Dimensions depend upon the motor brand.

Dimension chart, Pump set drawing and Performance curves

CEHA 3100/7 (with retaining stage)

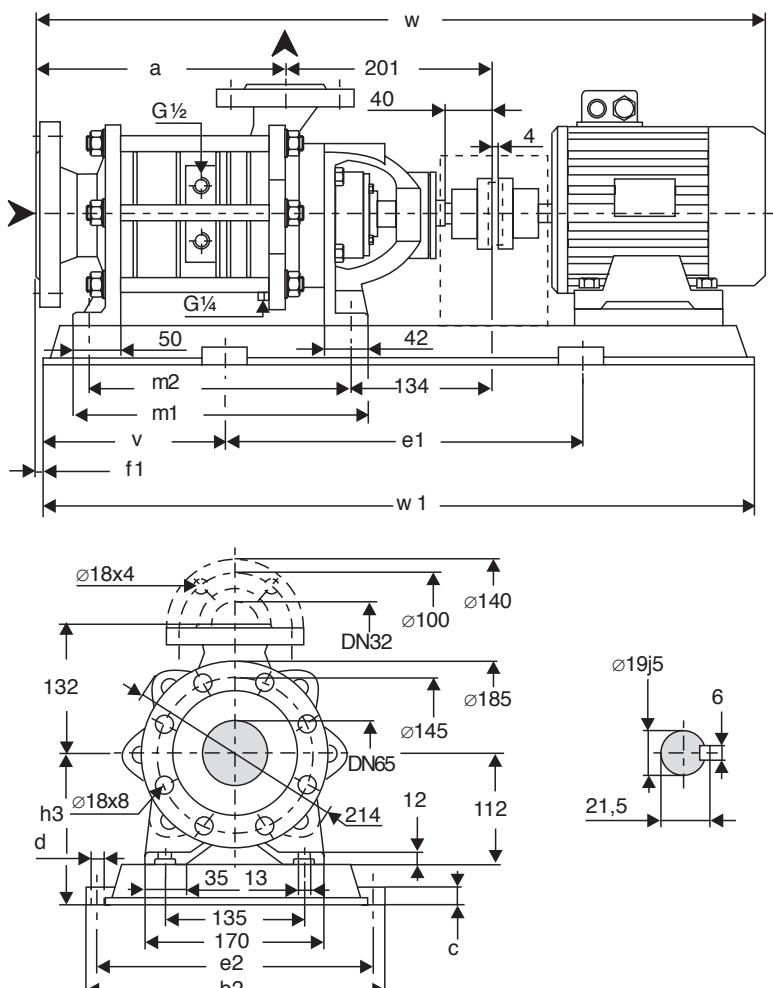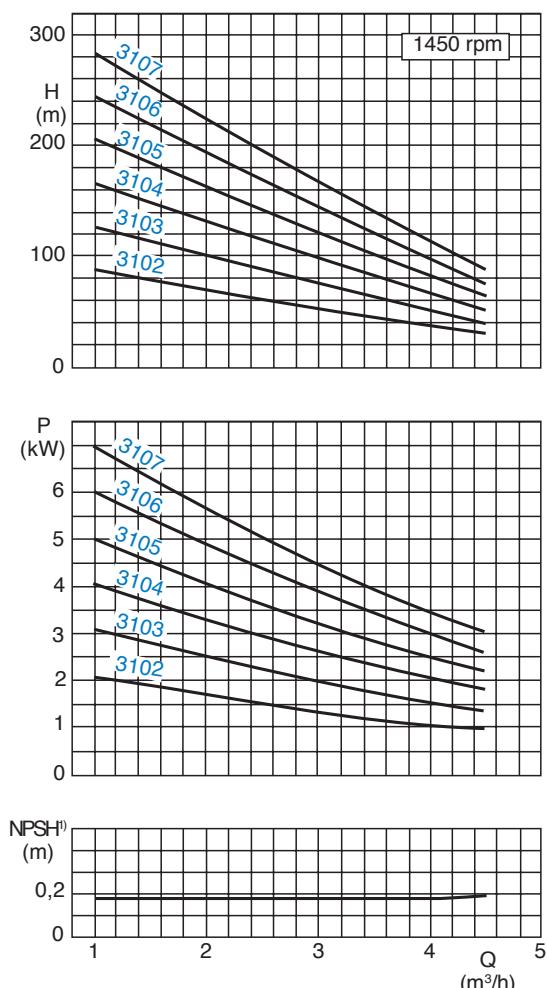

General: Values are valid for water $\rho = 1 \text{ kg/dm}^3$ and $\nu = 1 \text{ cSt}$.

Design tolerances: Capacity $\pm 5\%$ - Delivery head $\pm 5\%$ - Power $+10\%$.
For designs with a mechanical seal or casing seal of soft Teflon, the tolerance for the delivery head is extended by 2% each.



Pump size	Motor kW	Motor size	Base plate	Coupl.	Weight pump set	a	b2	c	d	e1	e2	v	f1	h3	m1	m2	w *	w 1	
3102/7	1.5	90L	P272	BDS76	38	87	293	360	25	19	540	320	140	-13	177	341	307	822	820
	2	100L		BDS88		100											880		
3103/7	2	100L	P272	BDS88	42	104	333	360	25	19	540	320	140	-13	177	381	347	920	820
	2.5	100L				106													
3104/7	2.5	100L	P015	BDS88	45	101	373	361	25	15	600	325	160	-13	162	421	387	960	920
	3.6	112M				107													
3105/7	2.5	100L	P015	BDS88	48	107	413	361	25	15	600	325	160	-13	162	461	427	1000	920
	3.6	112M				110													
3106/7	3.6	112M	P017	BDS88	52	117	453	361	25	15	700	325	200	-13	172	501	467	1046	1100
	5	132S		BDS103		151													
3107/7	3.6	112M	P017	BDS88	55	120	493	361	25	15	700	325	200	-13	172	541	507	1086	1100
	5	132S				154													

¹⁾ A safety margin of 1 m has to be added when using a liquid containing gas.

* Dimensions depend upon the motor brand.

Dimension chart, Pump set drawing and Performance curves

CEHA 3600/7 (with retaining stage)

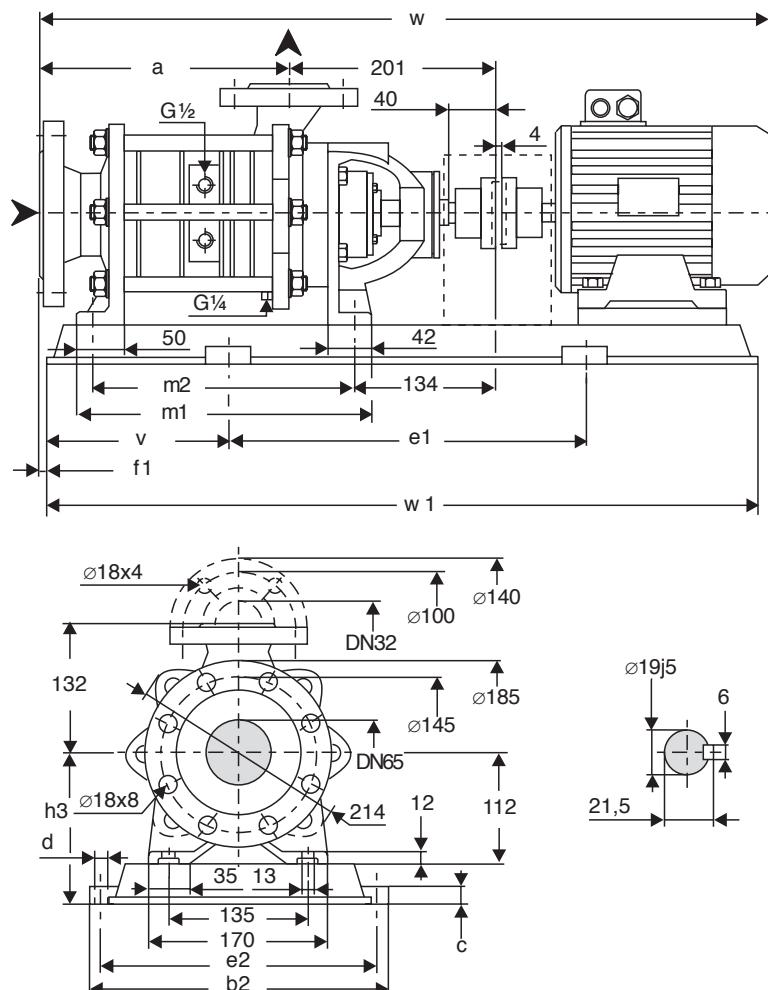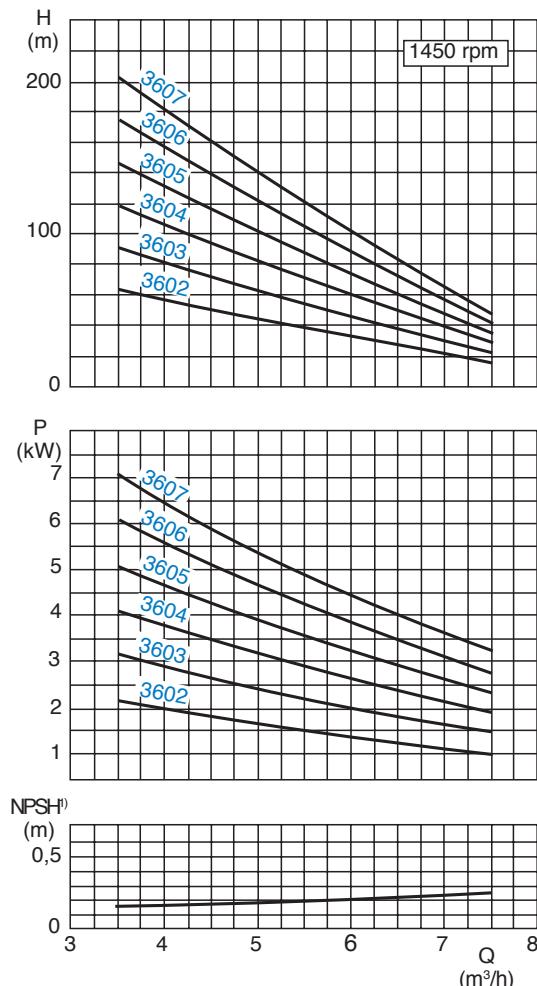

General: Values are valid for water $\rho = 1 \text{ kg/dm}^3$ and $\nu = 1 \text{ cSt}$.

Design tolerances: Capacity $\pm 5\%$ - Delivery head $\pm 5\%$ - Power $+10\%$.
For designs with a mechanical seal or casing seal of soft Teflon, the tolerance for the delivery head is extended by 2% each.



Pump size	Motor kW size		Base plate	Coupl.	Weight pump set		a	b2	c	d	e1	e2	v	f1	h3	m1	m2	w*	w1
3602/7	1.5	90L	P272	BDS76	38	87	293	360	25	19	540	320	140	-13	177	341	307	822	820
	2	100L		BDS88		100												880	
3603/7	2	100L	P272	BDS88	42	104	333	360	25	19	540	320	140	-13	177	381	347	920	820
	2.5	100L				106													
3604/7	2.5	100L	P015	BDS88	45	101	373	361	25	15	600	325	160	-13	162	421	387	960	920
	3.6	112M				107												966	
3605/7	2.5	100L	P015	BDS88	48	107	413	361	25	15	600	325	160	-13	162	461	427	1000	920
	3.6	112M				110												1006	
3606/7	3.6	112M	P017	BDS88	52	117	453	361	25	15	700	325	200	-13	172	501	467	1046	1100
	5	132S		BDS103		151												1142	
3607/7	3.6	112M	P017	BDS88	55	120	493	361	25	15	700	325	200	-13	172	541	507	1086	1100
	5	132S		BDS103		154												1182	

¹⁾ A safety margin of 1 m has to be added when using a liquid containing gas.

* Dimensions depend upon the motor brand.

Dimension chart, Pump set drawing and Performance curves

CEHA 4100/7 (with retaining stage)

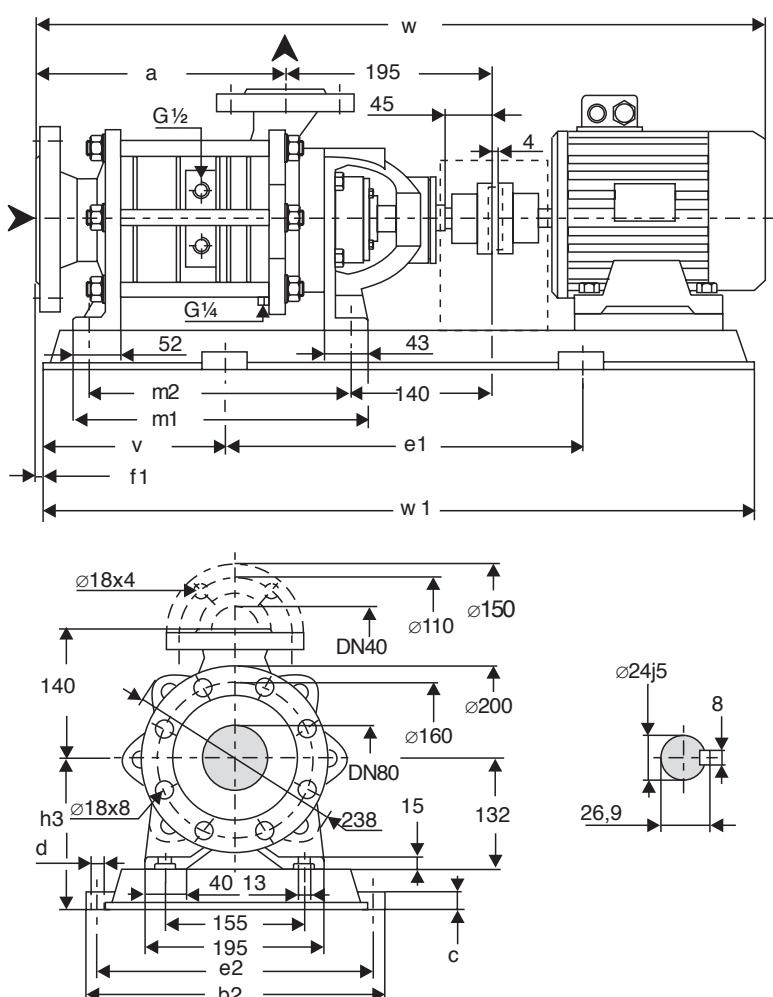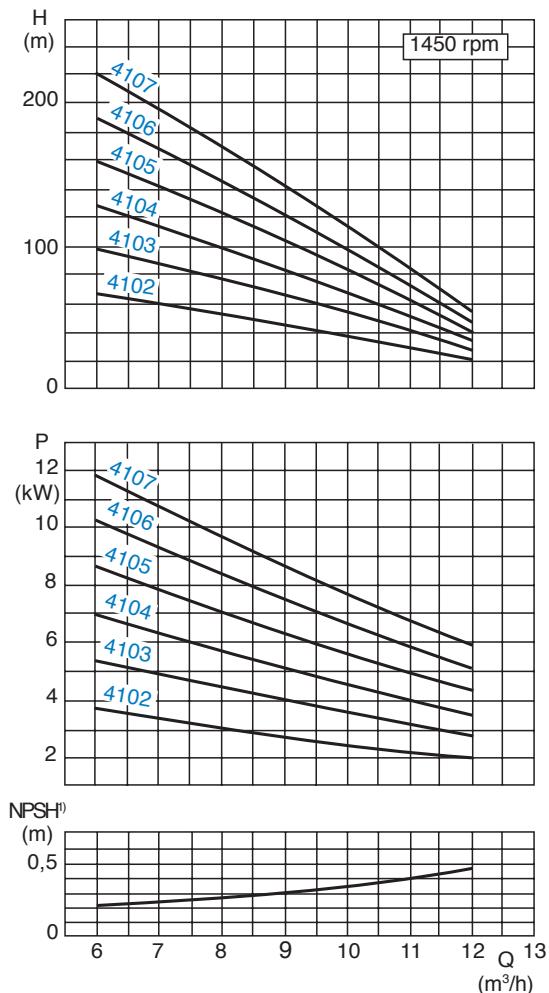

General: Values are valid for water $\rho = 1 \text{ kg/dm}^3$ and $\nu = 1 \text{ cSt}$.

Design tolerances: Capacity \pm 5% - Delivery head \pm 5% - Power +10%.
For designs with a mechanical seal or casing seal of soft Teflon, the tolerance for the delivery head is extended by 2% each.



Pump size	Motor		Base plate	Coul.	Weight														
	kW	size			pump	set	a	b2	c	d	e1	e2	v	f1	h3	m1	m2	w*	w1
4102/7	2.5	100L	P015	BDS88	53	112	378	361	25	15	600	325	160	-23	182	404	370	959	920
	3.6	112M				115												965	
4103/7	3.6	112M	P015	BDS88	59	121	433	361	25	15	600	325	160	-23	182	459	425	1020	920
	5	132S	P017	BDS103		158												1116	1100
4104/7	3.6	112M	P017	BDS88	65	130	488	361	25	15	700	325	200	-23	192	514	480	1075	1100
	5	132S		BDS103		164												1171	
4105/7	5	132S	P385	BDS103	70	172	543	490	30	24	740	440	200	-23	212	569	535	1226	1140
	6.8	132M				232												1237	
4106/7	6.8	132M	P436	BDS103	76	248	598	540	30	24	840	490	215	-23	212	624	590	1292	1270
	10	160M				278												1379	
4107/7	6.8	132M	P436	BDS103	82	230	653	540	30	24	840	490	215	-23	212	679	645	1347	1270
	10	160M	P487			296	653	610	35	28	940	550	240		260			1434	1420

¹⁾ A safety margin of 1 m has to be added when using a liquid containing gas.

* Dimensions depend upon the motor brand.

Dimension chart, Pump set drawing and Performance curves

CEHA 5100/7 (with retaining stage)

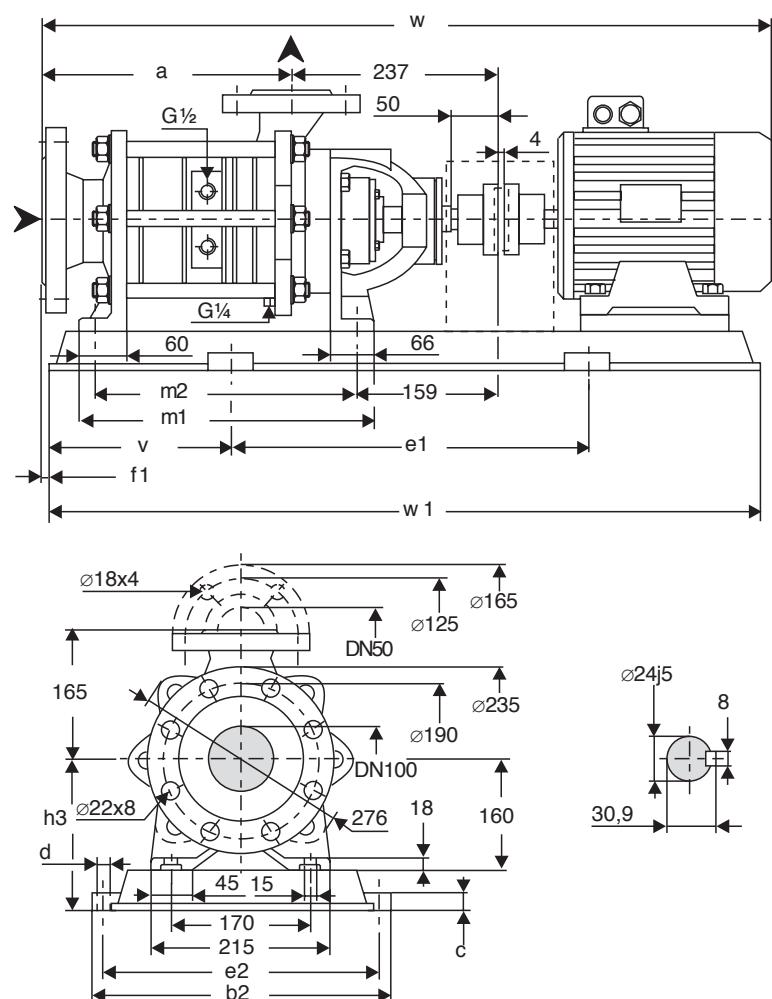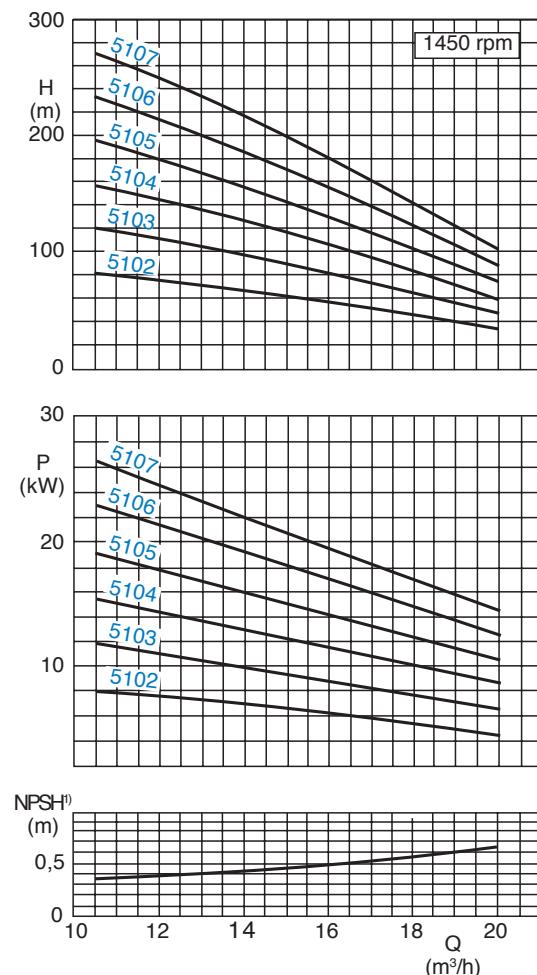

General: Values are valid for water $\rho = 1 \text{ kg/dm}^3$ and $\nu = 1 \text{ cSt}$.

Design tolerances: Capacity $\pm 5\%$ - Delivery head $\pm 5\%$ - Power $+10\%$.
For designs with a mechanical seal or casing seal of soft Teflon, the tolerance for the delivery head is extended by 2% each.



Pump size	Motor kW	Motor size	Base plate	Coupl.	Weight pump set	a	b2	c	d	e1	e2	v	f1	h3	m1	m2	w*	w1	
5102/7	5	132S	P017	BDS103	80	180	455	361	25	15	700	325	200	-28	220	503	465	1180	1100
	6.8	132M				232											1191		
5103/7	6.8	132M	P385	BDS103	90	252	530	490	30	24	740	440	200	-28	240	578	540	1266	1140
	10	160M				292											1353	1270	
5104/7	10	160M	P487	BDS103	101	325	605	610	35	28	940	550	240	-28	260	653	615	1428	1420
	13.5	160L				347											1472		
5105/7	10	160M	P487	BDS103	111	335											1503	1420	
	13.5	160L				357	680	610	35	28	940	550	240	-28	260	728	690	1547	
	15	180M				395											1640	1620	
5106/7	13.5	160L	P538	BDS118	121	408	755	660	35	28	1060	600	280	-28	260	803	765	1622	1620
	15	180M				429											1715		
5107/7	15	180M	P538	BDS118	132	440	830	660	35	28	1060	600	280	-28	280	878	840	1790	1620
	17.5	180L				463													

¹⁾ A safety margin of 1 m has to be added when using a liquid containing gas.

* Dimensions depend upon the motor brand.

Dimension chart, Pump set drawing and Performance curves

CEHA 6100/7 (with retaining stage)

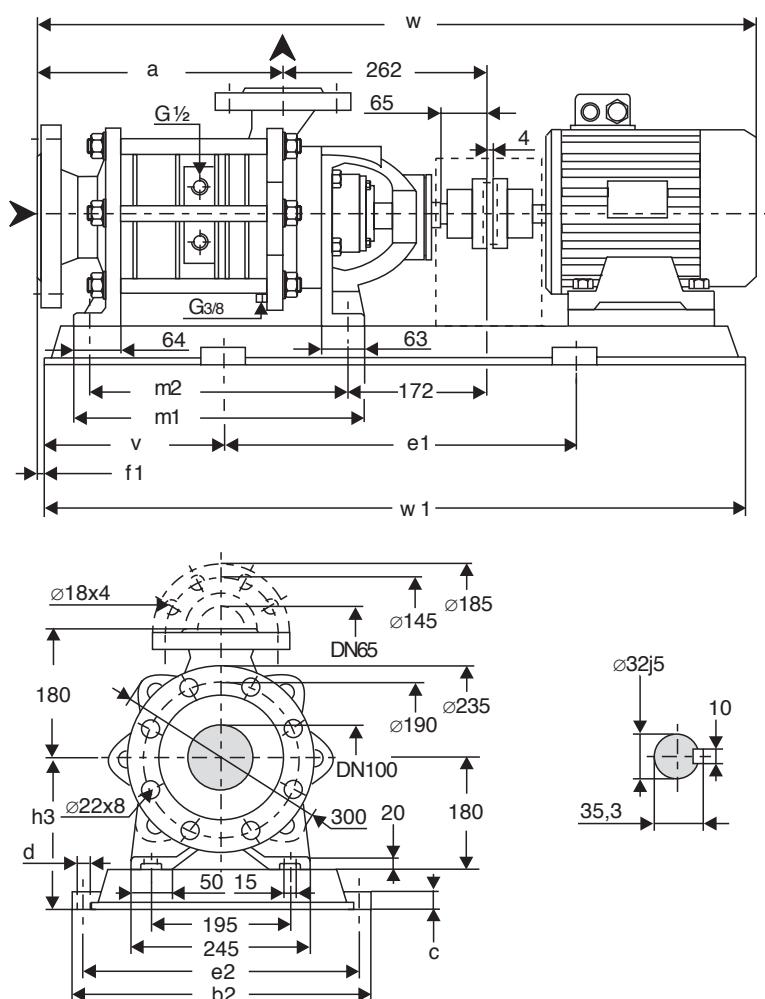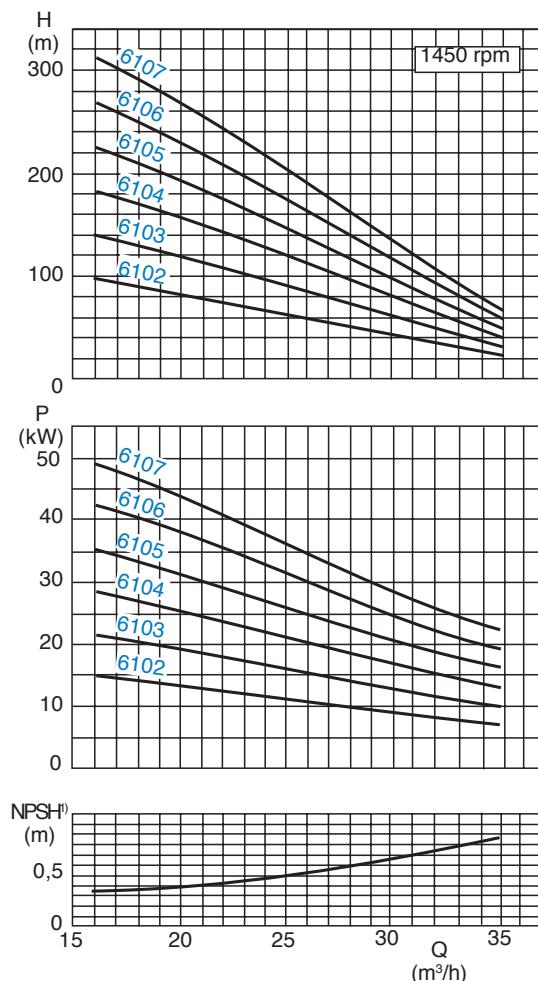

General: Values are valid for water $\rho = 1 \text{ kg/dm}^3$ and $\nu = 1 \text{ cSt}$.

Design tolerances: Capacity $\pm 5\%$ - Delivery head $\pm 5\%$ - Power $+10\%$.
For designs with a mechanical seal or casing seal of soft Teflon, the tolerance for the delivery head is extended by 2% each.

Pump size	Motor size	Base plate	Coupl.	Weight pump set	a	b2	c	d	e1	e2	v	f1	h3	m1	m2	w*	w1	
6102/7	6.8	132M	P385	BDS103	105	267	518	490	30	740	440	200	-35	260	571	1279	1140	
	10	160M				307	540	540	24	840	490	215			533	1366	1270	
6103/7	10	160M	P487	BDS103	117	331										1456		
	13.5	160L				363	608	610	35	28	940	550	240	-35	280	661	623	1500
	15	180M				384											1593	1420
6104/7	15	180M	P538	BDS118	130	439										751	713	1683
	17.5	180L				461	698	660	35	28	1060	600	280	-35	280			1620
	24	200L				540											300	1738
6105/7	15	180M	P538	BDS118	142	450										841	803	1773
	17.5	180L				473	788	660	35	28	1060	600	280	-35	280			1828
	24	200L				485												1620
6106/7	17.5	180L	S389	BDS118	155	391										280		1863
	24	200L				470	878	540	40	28	1200	490	300	-35	300	931	893	1918
	30	225S				620											325	2018
6107/7	24	200L	S389	BDS135	167	482										300		1800
	30	225S				532	968	540	40	28	1200	490	300	-35	345	1021	983	2003
	36	225M				630											2080	2000

¹⁾ A safety margin of 1 m has to be added when using a liquid containing gas.

* Dimensions depend upon the motor brand.



Notes


It is the policy of Sterling Fluid Systems to seek continually for ways to improve its products and the right is reserved to alter specifications at anytime without prior notice.

Sterling SIHI Side Channel pumps

Sterling Fluid Systems offers an extensive Side Channel pump range under its brand name Sterling SIHI. Sterling Fluid Systems has more than 80 years of experience in manufacturing, installation and support of Side Channel pumps. The Sterling SIHI Side Channel pumps can be found in a wide application range for the:

- Chemical market
- Pharmaceutical industry
- Petrochemical industry
- Food industry
- Ship yards
- LPG industry
- and many more ...

The Sterling SIHI Side Channel pump range

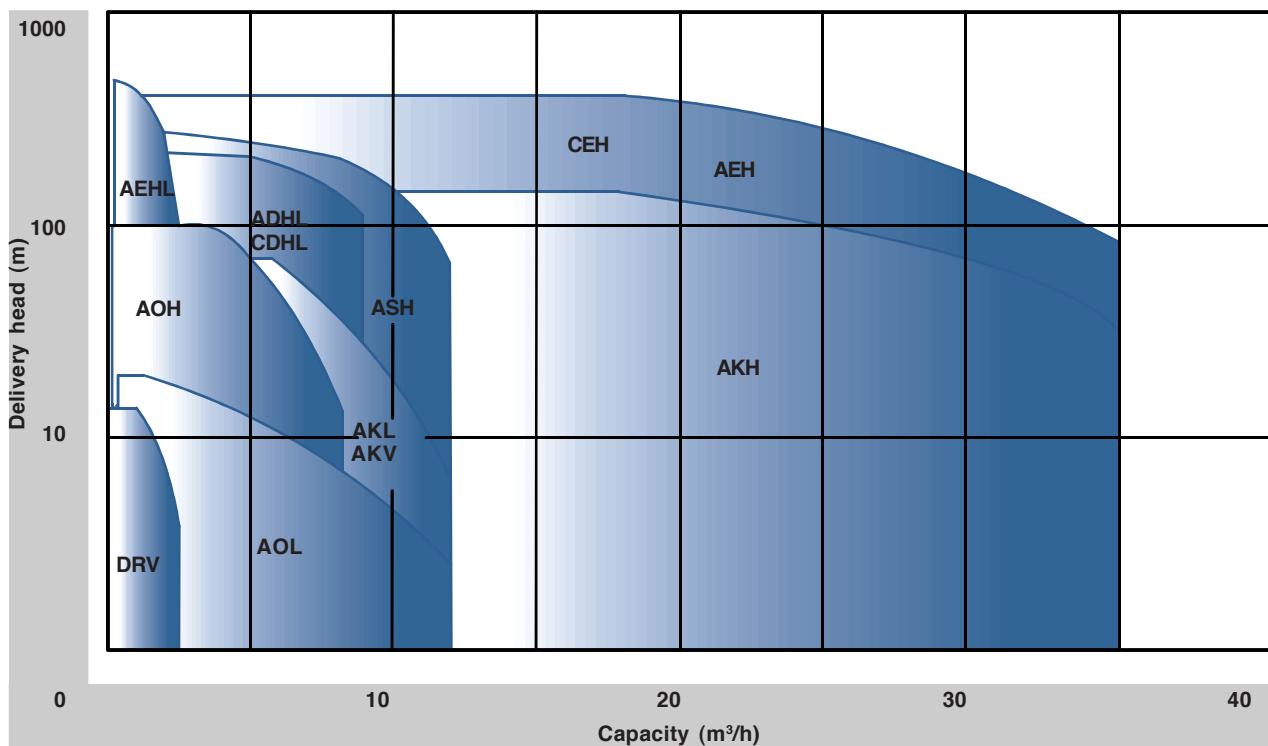

The benefits of the Sterling SIHI Side Channel pumps

- Self priming
- Gas handling
- High-resistant materials
- Performance curve characteristics
- High efficiency
- Low $NPSH_R$ value
- Modular hydraulic system

The Sterling SIHI Side Channel pumps comply with the highest demands of our customers and are the best solution for the handling of liquids under critical physical conditions.

Sterling Fluid Systems (Europe)

Sterling Fluid Systems (Austria)
Wien
Telephone: +43 (0) 1 680 050
Fax: +43 (0) 1 680 0521
E-Mail: sales_austria@sterlingshi.de

Sterling Fluid Systems (France)
Trappes
Telephone: +33 (0) 1 34 82 39 00
Fax: +33 (0) 1 34 82 39 61
E-Mail: sterlingshi@easynet.fr

Sterling Fluid Systems (Greece)
Athens
Telephone: +302 (0) 10 9570783
Fax: +0302 (0) 10 9568121
E-Mail: sales_greece@sterlingshi.de

Sterling Fluid Systems (Netherlands)
Beverwijk
Telephone: +31 (0) 251 263 232
Fax: +31 (0) 251 226 309
E-Mail: info@sihi.nl

Sterling Fluid Systems (Schweiz)
Schaffhausen
Telephone: +41 (0) 52 6440606
Fax: +41 (0) 52 6440616
E-Mail: info@sterlingfluid.ch

Sterling Fluid Systems (Belgium)
Groot-Bijgaarden
Telephone: +32 (0) 2 481 7711
Fax: +32 (0) 2 481 7737
E-Mail: sales@sterlingfluidsystems.be

Sterling SIHI (Germany)
Itzehoe
Telephone: 49 (0) 4821 77101
Fax: 49 (0) 4821 771274
E-Mail: sales@sterlingshi.de

Sterling Fluid Systems (Hungary)
Veszprém
Telephone: +36 (0) 88 40 66 33
Fax: +36 (0) 88 40 66 35
E-Mail: sales_hungary@sterlingshi.de

Sterling Fluid Systems (Polska)
Warszawa
Telephone: +48 (0) 22 849 7097
Fax: +48 (0) 22 849 6726
E-Mail: sterling@sterling.pl

Sterling Fluid Systems (Spain)
Madrid
Telephone: +34 (0) 91 709 1310
Fax: +34 (0) 91 715 9700
E-Mail: mibsa@stnet.es

Sterling Fluid Systems (Czech Republic)
Olomouc
Telephone: +420 (0) 587 433 651
Fax: +420 (0) 587 433 653
E-Mail: sterling@sterling.cz

Sterling Fluid Systems (Italy)
Monza
Telephone: +39 (0) 039 2824 1
Fax: +39 (0) 039 2824 220
E-Mail: sterlingitaly@sidro.it

Sterling Fluid Systems (Romania)
Bucuresti
Telephone: +40 (0) 21 610 7188
Fax: +40 (0) 21 210 8287
E-Mail: sales_romania@sterlingshi.de

Sterling SAT
Dägeling, Germany
Telephone: +49 (0) 4821 9000-0
Fax: +49 (0) 4821 9000-501
E-Mail: sat@sterlingsat.com

Sterling Fluid Systems (UK)
Altrincham/Cheshire
Telephone: +44 (0) 161 9286371
Fax: +44 (0) 161 9252129
E-Mail: uksales@sterlingfluid.com

Sterling Fluid Systems (Americas)

Sterling Fluid Systems (USA)
Grand Island
Telephone: (1) 716 773 6450
Fax: (1) 716 773 2330
E-Mail: mail@sihi.com

Sterling Fluid Systems (Canada)
Guelph
Telephone: (1) 519 824 4600
Fax: (1) 519 824 7250
E-Mail: mail@sihi.com

Sterling Fluid Systems (Asia)

Sterling Fluid Systems (Asia)
Singapore
Telephone: (65) 68630 828
Fax: (65) 68630 868
E-Mail: asia.marketing@sterlingasia.com.sg

SIHI (Australia)
Bayswater
Telephone: (61) 3 9720 1500
Fax: (61) 3 9720 4076
E-Mail: sfsaus@ozemail.com.au

Sterling Fluid Systems (China)
Shanghai
Telephone: (8621) 6336 3488/6326 4171/6326 4062
Fax: (8621) 63268487
E-Mail: asia.marketing@sterlingasia.com.sg

Sterling Fluid Systems (Malaysia)
Selangor Darul Ehsan
Telephone: (60) 3 8070 0198/99
Fax: (60) 3 8070 0240
E-Mail: sfsmia@tm.net.my

Sterling Fluid Systems (Philippines)
Muntinlupa City
Telephone: (63) 2 809 4908
Fax: (63) 2 807 2013
E-Mail: asia.marketing@sterlingasia.com.sg

Sterling Fluid Systems (Thailand)
Bangkok
Telephone: (66) 2 319 2567
Fax: (66) 2 319 25673/4
E-Mail: sfsthai@sterlingthai.co.th

