

BBA 500G Diesel Driven

Ultra High Flow Dewatering Pump

Max. 4500 m³/hour, Max. 26 mwc



Pump specifications:

Type.....	BA500G D675
Max. flow	4500 m ³ /hour (19800 US GPM)
Max. pressure	26 mwc (86 ft.)
Connections.....	Suction DN600 – Discharge DN500
Solids handling	115 mm (4,5")
Impeller type	Axial flow impeller
Priming system	BBA MP100
Engine	Volvo Penta TAD1371VE
Emission standard..	Stage IV / Tier 4 final
Canopy	EL23-58
Sound level.....	75 dB(A) at 10m
Weight (net).....	10.900 kg (23.980 lbs)

FEATURES

BA auto prime pump

The BA range of pumps has been designed with a clear focus on reliability, efficiency and durability. Featuring a 100% mechanical priming system, the BA series pumps quickly prime and re-prime, even from dry conditions. The heavy build style of both pump and canopy make the BA range perfect for use in the strenuous contractor market.

World-class performance

The BA range is built to be deployed on the most demanding dewatering and sewage bypassing applications. Using high efficiency pumps and state-of-the-art diesel engines, the pumps offer maximum performance at minimal cost, fully in-sync with the company philosophy of "Lowest cost of ownership".

Sustainability

- High efficiency pumps minimising fuel consumption
- Emissions in accordance with EU Stage & US EPA Tier regulations
- Corrosion free hot dip galvanised canopy
- Corrosion free composite door panels and powder coated plating
- 100% Oil-spill free priming system
- Fully bunded unit eliminating fuel/oil spills at all times

Complete package designed & built by BBA Pumps

- Complete in-house design & production
- Over 60 years of experience in the market
- Complete testing facility in-house
- Contemporary & functional design
- Durable & eco-friendly materials
- Custom builds available

After sales service & product support

- Single supplier for parts, spares & accessories
- Dedicated customer help-desk (24h service)
- Dedicated service department in-house
- Global parts distribution network
- Optional global on-site servicing available
- Extensive training options available (technical & commercial), on-site or in-house

BBA 500G Diesel Driven





Ultra High Flow Dewatering Pump

Max. 4500 m³/hour, Max. 26 mwc



PERFORMANCE CURVES (740 RPM)

Continuous duty according ISO 9906

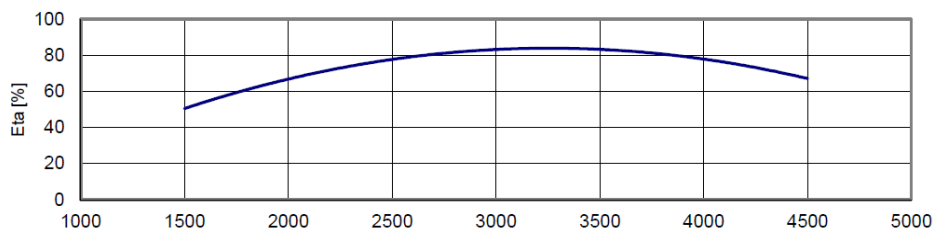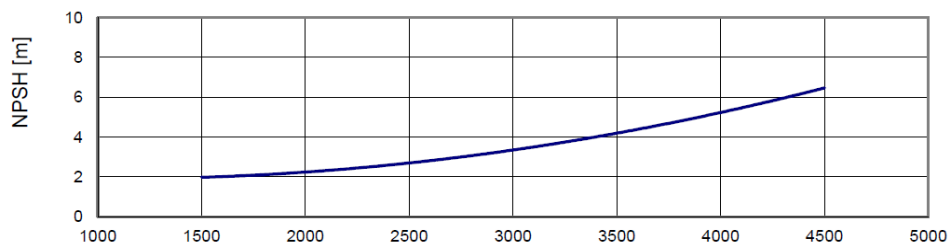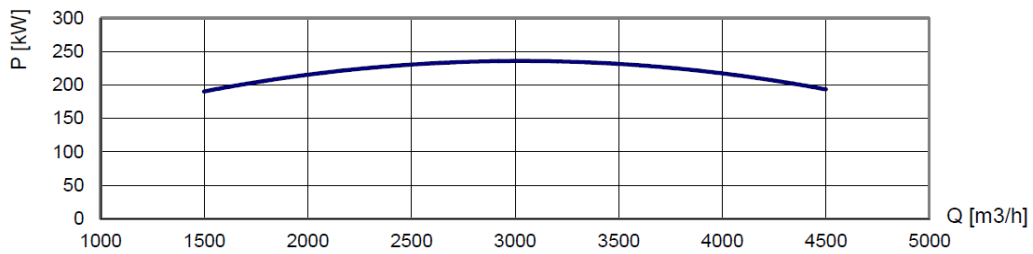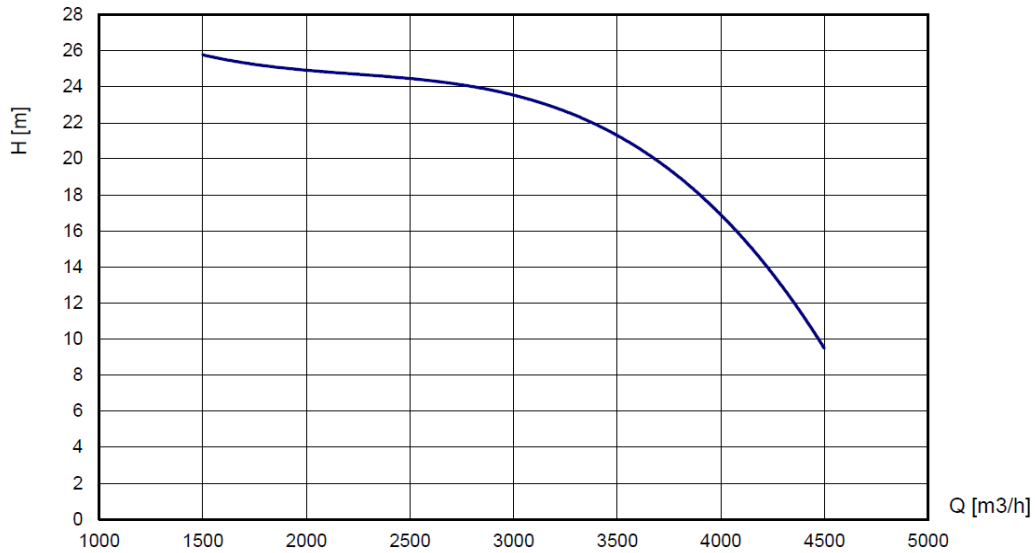

BBA 500G Diesel Driven

Ultra High Flow Dewatering Pump

Max. 4500 m³/hour, Max. 26 mwc



STANDARD TECHNICAL SPECIFICATIONS

BBA auto prime pump

Pump type.....	BA500G D675
Max. flow.....	4500 m ³ /hour (19800 US GPM)
Max. head.....	26 mwc (86 feet)
Impeller type.....	Axial flow impeller
Solids handling.....	115 mm (4.5 inch)
Best efficiency point.....	87%
Pump casing.....	Cast iron GG20
Impeller.....	Ductile iron GGG40
Pump shaft.....	42CrV6
Shaft seal.....	Mechanical seal



BBA priming system

Pump type.....	BBA MP100 Diaphragm pump
Air handling capacity.....	100 m ³ /h (59 CFM)
Max. vacuum.....	8.5 m (29 inHg)
Drive.....	E-motor 24V
Float box.....	St 37 hot dip galv.
Float.....	Stainless steel 304
Start/stop.....	Fully automatic



Engine

Engine brand.....	Volvo Penta
Engine type.....	TAD1371VE
Flywheel power.....	275 kW (374 Hp)
Engine speed.....	1500 RPM
Rating.....	IFN power
Fuel consumption.....	198 g/kWh
Governor type.....	Electronic
Displacement.....	12.78 l
Number of cylinders.....	6
Aftertreatment.....	SCR, AdBlue®
Exhaust level.....	Stage IV – Tier 4 Final

BBA control panel LC30

- Auto start/stop system
- Two float switches included (10 m cable)
- Switch Manual-0-Auto
- Rpm. control with push buttons
- Warning lights
- The 4.3" LCD monitor displays additional engine data, e.g. actual engine speed, working hours, battery voltage, fuel consumption and failures in clear text (10 language support)



BBA non return valve 600 mm (shipped loose)

Flange size entrance.....	DN500 PN6
Flange size delivery.....	DN600 PN6
Casing.....	St 37 hot dip galvanised
Lifting point.....	Fitted with 4 lifting points
Max Pressure.....	4 bar – 57 PSI



BBA 500G Diesel Driven

Ultra High Flow Dewatering Pump


Max. 4500 m³/hour, Max. 26 mwc



CANOPY EL23-58

BBA sound attenuating canopy

Canopy type.....	EL23-58
Dimensions L x W x H	5830 x 2306 x 2300 mm
Dimensions L x W x H	229 x 90.8 x 90.5 inch
Basic frame.....	Hot dip galvanised
Doors	8 Easy-access doors (lockable)
Door panels	ABS/ASA
Fuel tank	PE net 300 ltr. (80 US Gallon)
Fuel tank autonomy	4 hours (at 1800 rpm BEP)
Fuel tank cap	60 mm (2.5 inch)
AdBlue® tank.....	PE net 300 ltr.(80 US Gallon)
Forklift pockets.....	Fitted with 2 forklift pockets
Lifting point	Fitted with 4 lifting points
Oil drain pump	Drain pump for motor oil installed (hand pump)
Connections.....	Flange connections
Exhaust system	Aftertreatment fully integrated in the canopy
Emergency stop.....	Applicable
Additional.....	Fitted with oil-water separator
Documentation	User manual & BBA warranty book

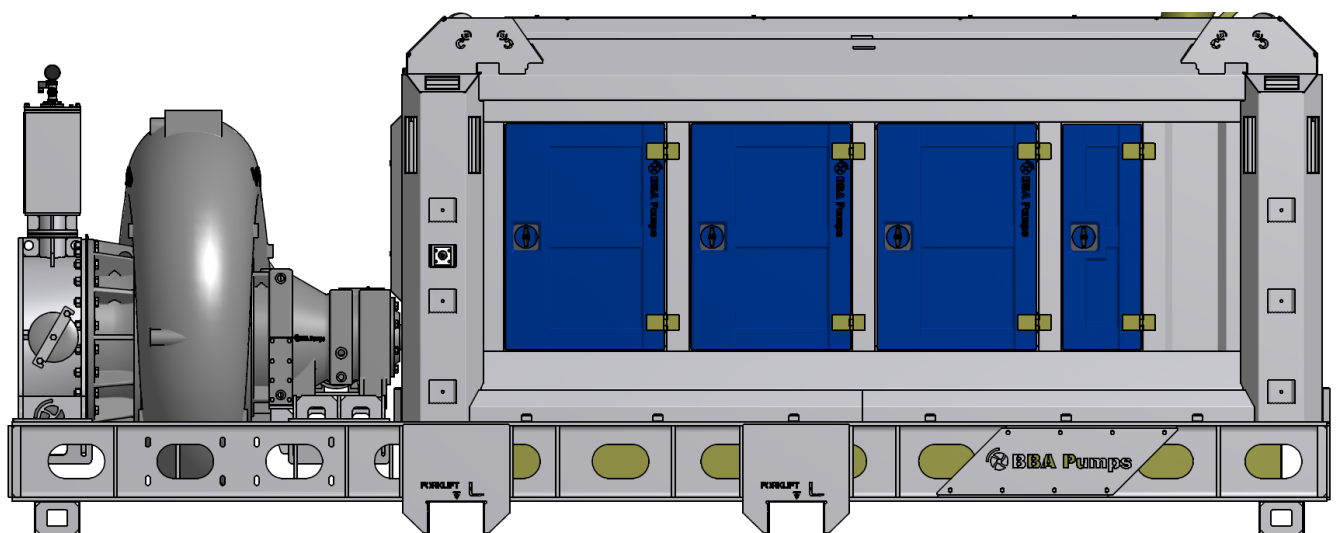

BBA 500G Diesel Driven

Ultra High Flow Dewatering Pump

Max. 4500 m³/hour, Max. 26 mwc




Factory Acceptance Test
Extensive testing facility in-house. FAT must be conducted formally and be witnessed by the owner and/or project manager.




LED lights
Fully integrated in the canopy for easy operation throughout the evening and night.



Safety
Extremely durable and lockable T-locks offering perfect grip.



Fully bundled unit
Fully bundled unit eliminating fuel/oil and AdBlue® spills at all times.



Cardan shaft
Cardan shaft between pump and diesel engine for smooth operation, assembly angle 2.5° - 3°



Ratio transmission gearbox
Hydraulically actuated clutches and helical gearing for a smooth operating speed reduction between engine and pump.



Double vacuum pump
Diaphragm pump, air-cooled, water-resistant and oil-spillage free. Air capacity of 100 m³ per hour.



User manual BA series
Extensive user manual with important information concerning the pump unit, pump installation and safety warnings. Available in several languages.